

Create Something

Extraordinary



FOR THE WAY IT'S MADE.®




KitchenAid® Major Appliance
Specifications & Dimensions

Freestanding Bottom-Freezer Refrigerators

PRODUCT DIMENSIONS – shown in inches/cm

MODEL NO.	OVERALL HEIGHT* (A)	CABINET WIDTH (B)	DEPTH DOOR OPEN 90° (C)	DEPTH WITH HANDLES (D)
COUNTER-DEPTH				
KBRS20EV KBLS20EV	69 ¹⁵ / ₁₆ / 177.6	35 ⁵ / ₈ / 90.5	61 / 154.9	29 ³ / ₈ / 74.6
STANDARD-DEPTH				
KBRS22KW KBLS22KW	69 ¹⁵ / ₁₆ / 177.6	32 ⁵ / ₈ / 82.9	62 / 157.5	33 ³ / ₈ / 84.8
KBRS19KT KBLS19KT	66 ¹⁵ / ₁₆ / 170	29 ⁵ / ₈ / 75.2	59 / 149.9	33 ³ / ₈ / 84.8

*Height is to top of hinge cover.

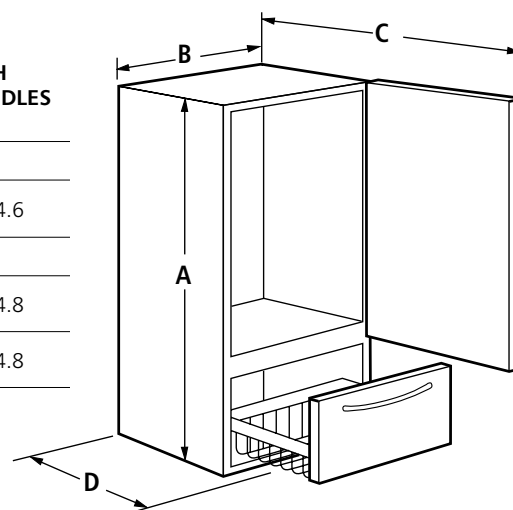


Freestanding Standard-Depth French Door Refrigerators

PRODUCT DIMENSIONS – shown in inches/cm

MODEL NO.	OVERALL HEIGHT* (A)	CABINET WIDTH (B)	DEPTH REFRIGERATOR DOOR OPEN 90° (C)	DEPTH FREEZER DRAWER OPEN (D)	DEPTH WITH HANDLES (E)
KFXS25RY	70 ¹ / ₈ / 178.1	35 ⁵ / ₈ / 90.5	48 / 121.9	54 / 137.2	34 ¹ / ₁₆ / 88.1


*Height is to top of hinge cover.

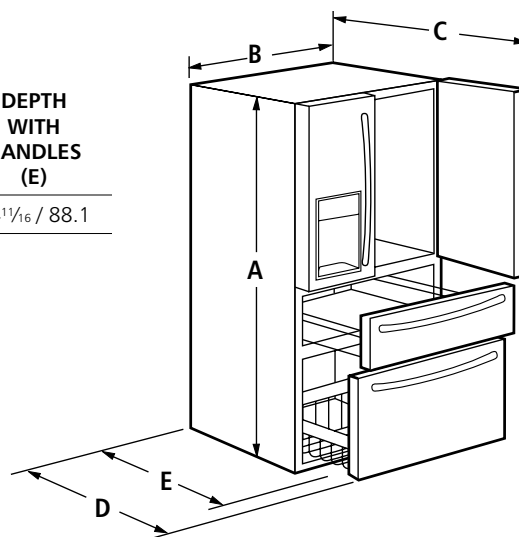

PRODUCT DIMENSIONS – shown in inches/cm

MODEL NO.	OVERALL HEIGHT* (A)	CABINET WIDTH (B)	DEPTH DOOR OPEN 90° (C)	DEPTH WITH HANDLES (D)
KFIS27CX	70 ¹ / ₈ / 178.1	35 ⁵ / ₈ / 90.5	47 ⁷ / ₈ / 121.6	35 ¹ / ₄ / 89.5
KBFS25EW	70 ¹ / ₈ / 178.1	35 ⁵ / ₈ / 90.5	48 ¹ / ₈ / 122.2	35 ¹ / ₂ / 90.2
KBFS22EW	70 ¹ / ₈ / 178.1	32 ⁵ / ₈ / 82.9	47 ¹ / ₈ / 119.7	34 ¹ / ₂ / 87.6

*Height is to top of hinge cover.

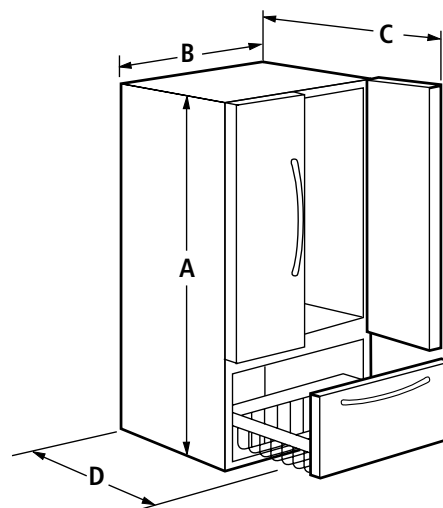


Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

Freestanding Counter-Depth French Door Refrigerators

PRODUCT DIMENSIONS – shown in inches/cm

MODEL NO.	OVERALL HEIGHT* (A)	CABINET WIDTH (B)	DEPTH DOOR OPEN 90° (C)	DEPTH WITH HANDLES (D)
KFCP22EX	71 ¹⁵ / ₁₆ / 182.7	35 ⁵ / ₁₆ / 90.5	44 ¹ / ₈ / 112.1	30 ¹ / ₈ / 76.5
KFCS22EV	71 ⁷ / ₈ / 182.6	35 ⁵ / ₁₆ / 90.5	44 ¹ / ₈ / 112.1	30 ¹ / ₈ / 76.5
KFCO22EV	71 ⁷ / ₈ / 182.6	35 ⁵ / ₁₆ / 90.5	44 ¹ / ₈ / 112.1	30 ¹ / ₈ / 76.5
KFIS20XV	70 ¹ / ₁₆ / 178	35 ⁵ / ₁₆ / 90.5	43 / 109.2	29 ³ / ₁₆ / 74.1
KBFS20EV	69 ¹⁵ / ₁₆ / 177.6	35 ⁵ / ₁₆ / 90.5	43 ³ / ₈ / 110.2	29 ³ / ₈ / 74.6

*Height is to top of hinge cover.

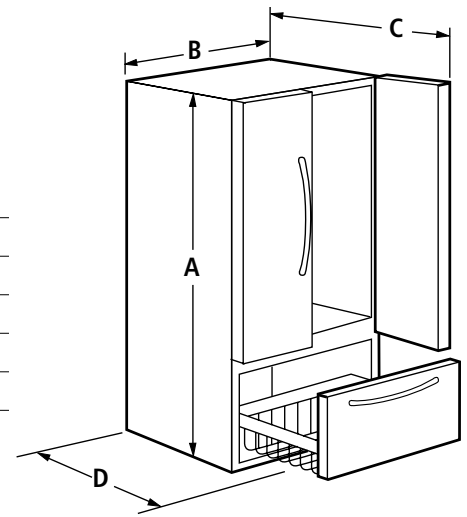


Freestanding Side-by-Side Refrigerators

PRODUCT DIMENSIONS – shown in inches/cm

MODEL NO.	OVERALL HEIGHT* (A**)	CABINET WIDTH (B)	DEPTH DOOR OPEN 90° (C)	DEPTH WITH HANDLES (D)
COUNTER-DEPTH				
KSC24C8EY	71 ⁵ / ₁₆ / 181.1	35 ⁷ / ₁₆ / 90.0	45 ⁷ / ₈ / 116.5	28 ²⁹ / ₃₂ / 73.4
KSO24C8EY	71 ⁵ / ₁₆ / 181.1	35 ⁷ / ₁₆ / 90.0	45 ⁷ / ₈ / 116.5	28 ²⁹ / ₃₂ / 73.4
KSC23C8EY	68 ⁷ / ₈ / 175	35 ⁷ / ₁₆ / 90.0	45 ⁷ / ₈ / 116.5	28 ²⁹ / ₃₂ / 73.4
KSCS25FV	71 ⁷ / ₈ / 182.5	35 ⁵ / ₁₆ / 90.5	45 ¹ / ₂ / 115.6	30 / 76.2
KSCS23FV	68 ⁷ / ₈ / 175	35 ⁵ / ₁₆ / 90.5	45 ¹ / ₂ / 115.6	30 / 76.2
KSBS25IV	71 ³ / ₄ / 182.2	35 ⁵ / ₁₆ / 90.5	45 ¹ / ₂ / 115.6	29 ³ / ₄ / 75.6
STANDARD-DEPTH				
KSF26C6XY	68 ⁷ / ₈ / 175	35 ⁷ / ₁₆ / 90.0	50 ¹³ / ₁₆ / 129.1	34 ³ / ₃₂ / 86.6
KSF26C4XY	68 ⁷ / ₈ / 175	35 ⁷ / ₁₆ / 90.0	50 ¹³ / ₁₆ / 129.1	34 ³ / ₃₂ / 86.6
KSRV22FV	66 ³ / ₈ / 168.6	32 ³ / ₄ / 83.2	49 ⁷ / ₈ / 126.7	33 ³ / ₄ / 85.7
KSRS22MW	66 ³ / ₈ / 168.6	32 ³ / ₄ / 83.2	49 ⁷ / ₈ / 126.7	33 ³ / ₄ / 85.7

*Height is to top of hinge cover.

**When leveling legs are fully extended to 1¹/₄" (3.2 cm) below the refrigerator, add 1¹/₈" (2.9 cm) to the overall height dimension.

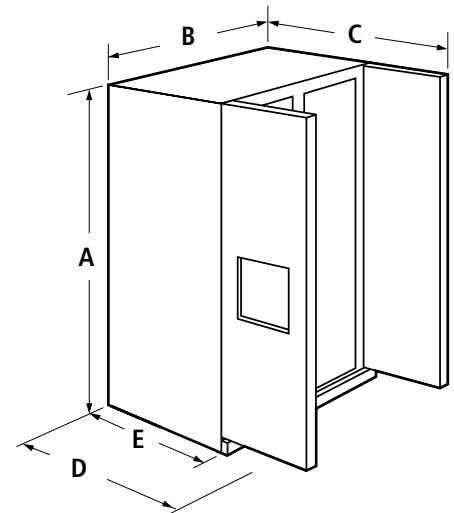

Built-In Side-by-Side Refrigerators


PRODUCT DIMENSIONS – shown in inches/cm

KSSC42FT, KSSC48FT, KSSC36QT, KSSC42QV, KSSC48QV

MODEL	48-INCH/121.9 CM	42-INCH/106.7 CM	36-INCH/91.4 CM
Front Width (A) (Trim edge to trim edge)	48¼ / 122.6	42¼ / 107.3	36¼ / 92.1
Front Height (B)*	83⅜ / 211.8	83⅜ / 211.8	83⅜ / 211.8
Depth (including door) (C)**	25⅞ / 64.5	25⅞ / 64.5	25⅞ / 64.5
Depth (excluding door) (D)	23½ / 59.7	23½ / 59.7	23½ / 59.7
Length (power cord) (E)	84 / 213.4	84 / 213.4	84 / 213.4
Depth (door open 90°)	51⅜ / 130.5	47⅞ / 121.6	44⅞ / 112.7

Leg levelers extended ⅛" (0.3 cm) below rollers; add 1 ⅛" (2.9 cm) for levelers fully extended 1¼" (3.2 cm) below rollers.

**Dimension is to front of top grille and does not include custom panel.

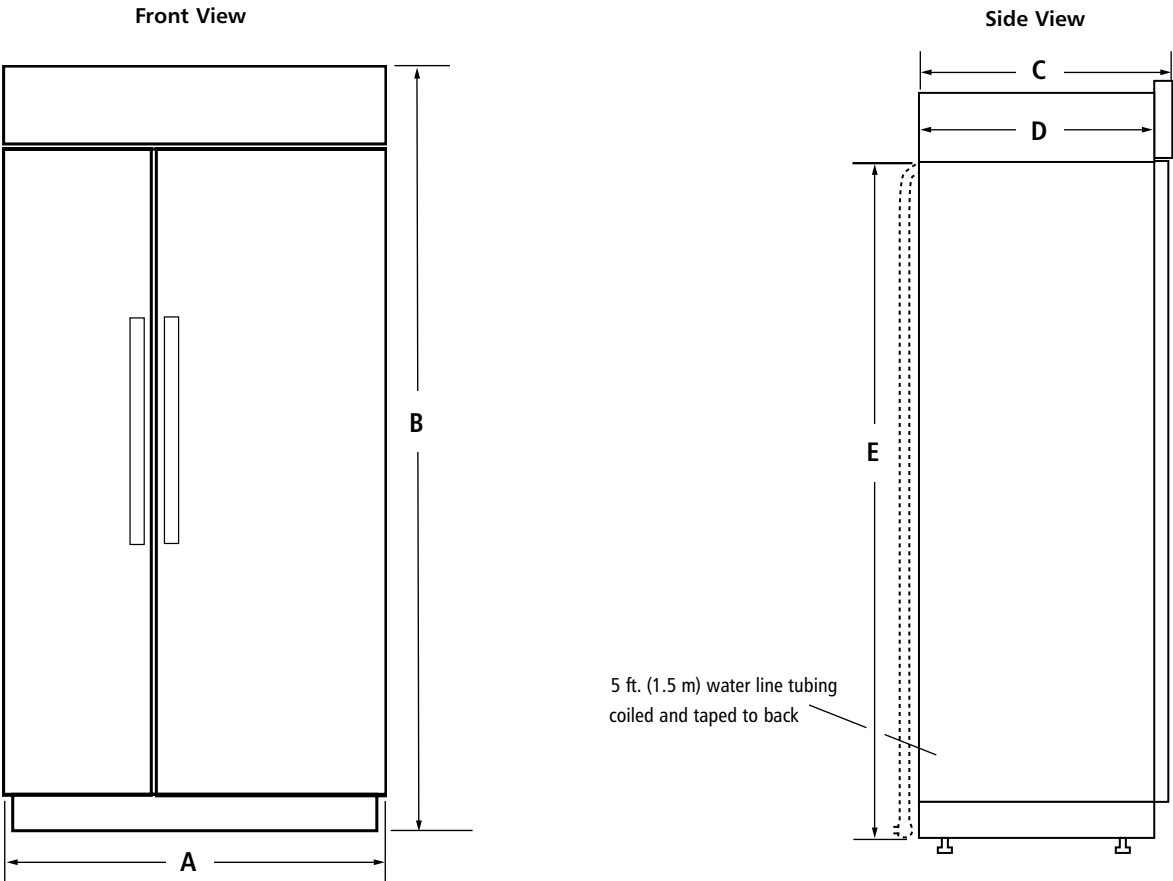


Built-In Side-by-Side Refrigerators (continued)

CUTOUT DIMENSIONS – shown in inches/cm

KSSC42FT, KSSC48FT, KSSC36QT, KSSC42QV, KSSC48QV

MODEL	48-INCH/121.9 CM	42-INCH/106.7 CM	36-INCH/91.4 CM
Width* (min./max.)	47½/47¾ / 120.6/121.3	41½/41¾ / 105.4/106	35½/35¾ / 90.2/90.8
Height (min./max.)	83½/84¾ / 212.1/215.3	83½/84¾ / 212.1/215.3	83½/84¾ / 212.1/215.3
Depth (min.)	24 / 61	24 / 61	24 / 61

*To allow sufficient airflow to the compressor, side trim must be on the outside of adjoining cabinets and not recessed into the cutout.

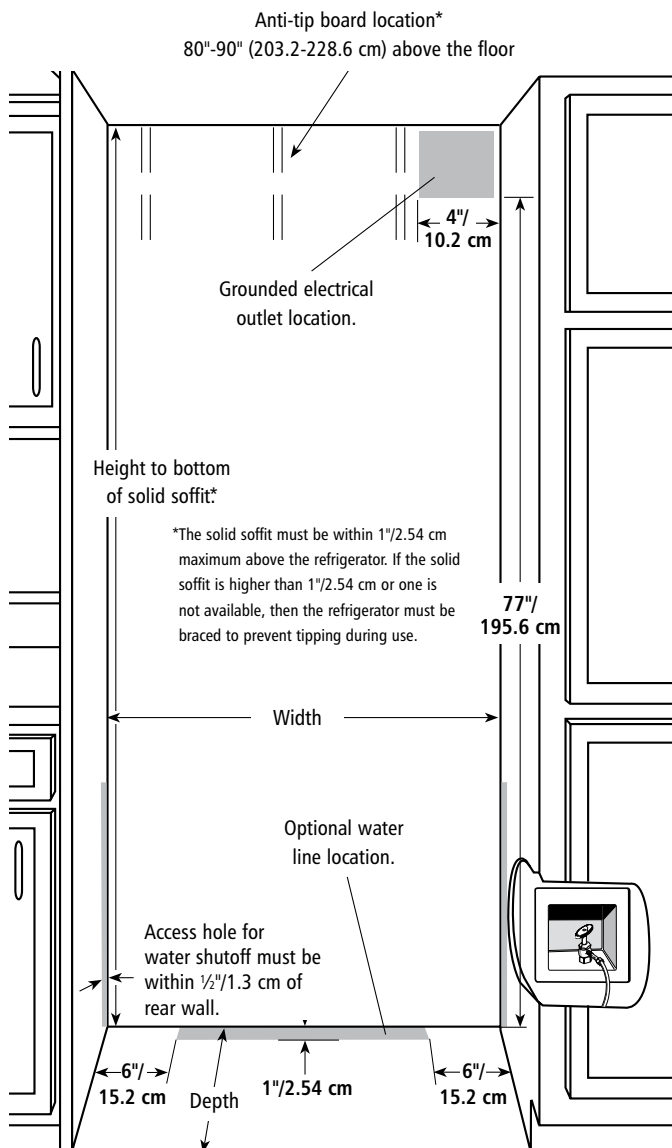

The location must permit both doors to open to a minimum of 90°. Allow 4½" (11.4 cm) minimum space between the side of the refrigerator and a corner wall, including baseboard area.

More clearance may be required if you are using overlay panels or custom handles.

Electrical: A 115 Volt, 60 Hz., AC only 15- or 20-amp fused, grounded electrical supply on a separate circuit. A GFCI (Ground Fault Circuit Interrupter) outlet is not recommended.

Water Supply: A cold water supply with water pressure between 30 and 120 psi (207-827 kPa).

Water shutoff may be located in the base cabinet on either side of refrigerator for easy access.

If installed behind refrigerator, water shutoff valve must be angled so that tubing is not damaged.

Face of cabinetry must be plumb.

Floor: Must support refrigerator (more than 600 pounds/272 kg) and must be at the same level as flooring in the room.

Built-In French Door and Bottom-Freezer Refrigerators

DIMENSIONS – shown in inches/cm


MODEL NO.	42-INCH/106.7 CM KBFC42FT KBFO42FT	36-INCH/91.4 CM KBRC36FT, KBLC36FT, KBRO36FT, KBLO36FT
PRODUCT DIMENSIONS		
Front Width (A)	42¼ / 107.3	36¼ / 92.1
Front Height (B)*	83⅞ / 211.8	83⅞ / 211.8
Depth (including door) (C)**	25⅞ / 64.5	25⅞ / 64.5
Depth (excluding door) (D)	23½ / 59.7	23½ / 59.7
Length (power cord) (E)	84 / 213.4	84 / 213.4
Depth (door open 90°)	44¼ / 112.4	59 / 150
CUTOUT DIMENSIONS		
Width (H)†	41½ / 105.4	35½ / 90.2
Height (min./max.) (I)	83½/84¾ / 212.1/215.3	83½/84¾ / 212.1/215.3
Depth (min.) (J)	24 / 61	24 / 61

*Leg levelers extended ⅞" (0.3 cm) below rollers; add 1⅞" (2.9 cm) for levelers fully extended 1¼" (3.2 cm) below rollers.

**Dimension is to front of top grille and does not include custom panel.

†To allow sufficient airflow to the compressor, side trim must be on the outside of adjoining cabinets and not recessed into the cutout.

PRODUCT DIMENSIONS

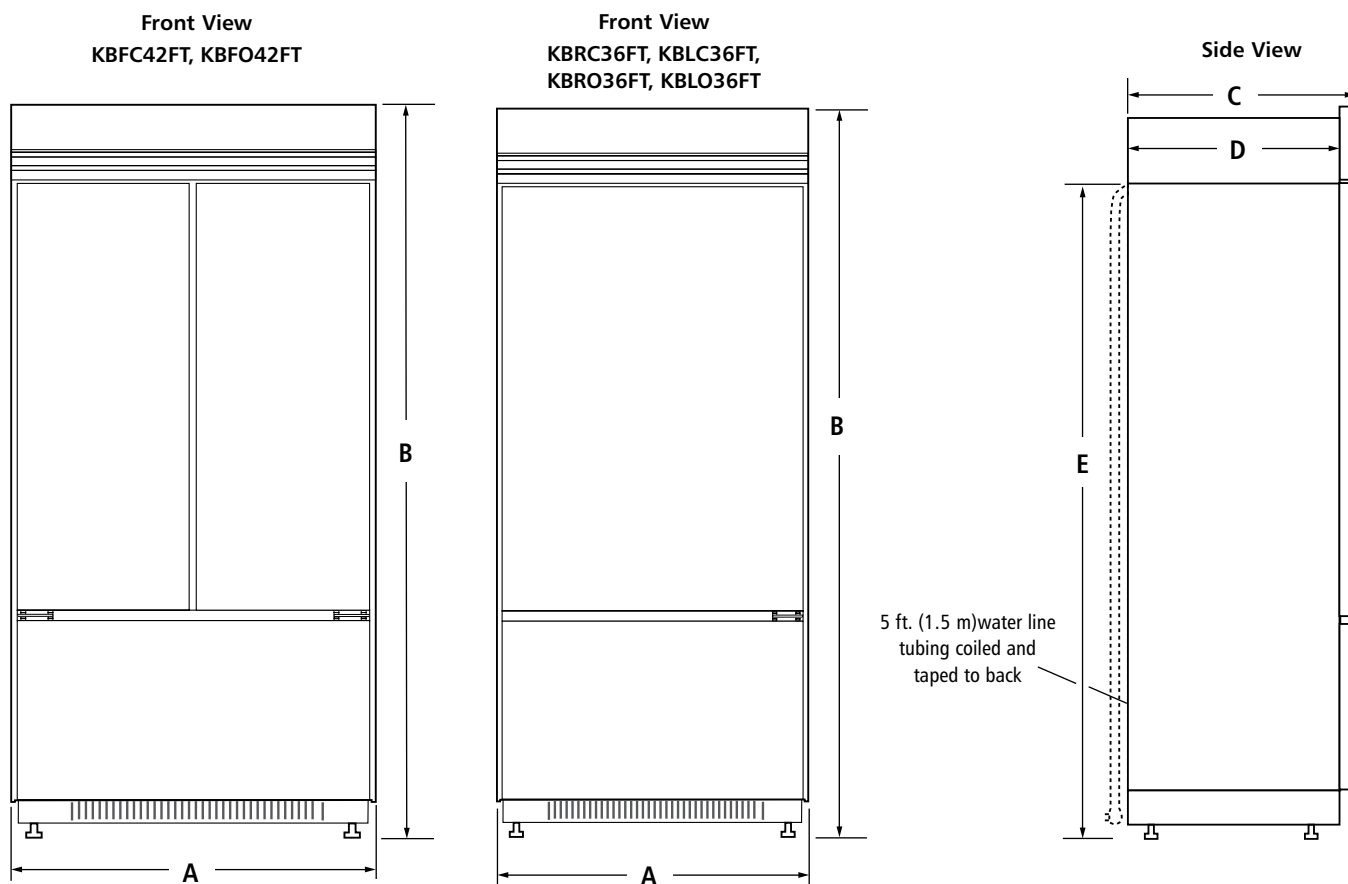


Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

Undercounter Refrigerators, Wine Cellars & Beverage Centres


PRODUCT DIMENSIONS

KURS24RS, KURS24LS

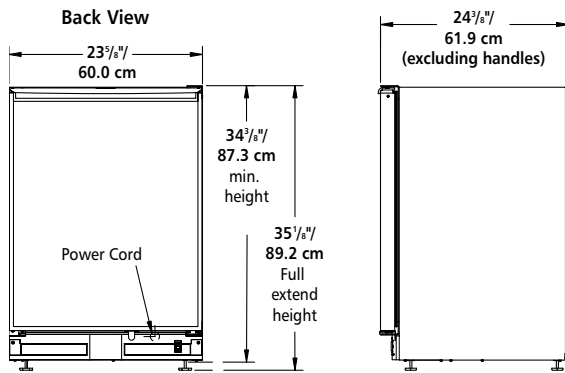

PRODUCT DIMENSIONS

KURG24RW, KURG24LW, KUWS24RS, KUWS24LS,
KBCS24RS, KBCS24LS

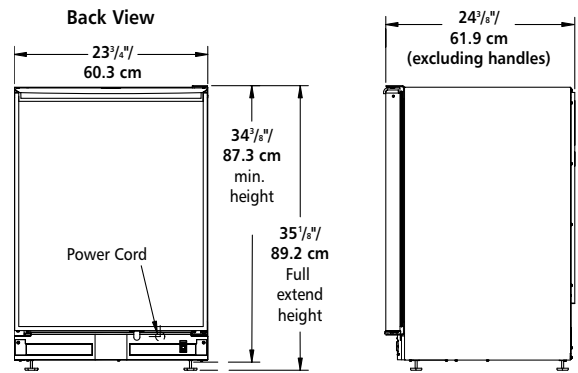

Automatic Ice Makers


DIMENSIONS – shown in inches/cm

MODEL NO.	18-INCH/45.7 CM KUIC18NNX	15-INCH/38.1 CM KUIC15NRX KUIC15NLX
PRODUCT DIMENSIONS		
Height (A)*	34 3/8 / 87.3	34 3/8 / 87.3
Width (B)	17 7/8 / 45.4	14 7/8 / 37.8
Depth (including handle) (C)	25 5/8 / 65.1	25 5/8 / 65.1
Depth (excluding handle) (D)	23 1/8 / 58.7	23 1/8 / 58.7
CUTOUT DIMENSIONS		
Height	34 min. – 34 1/2 max. 86.4 min. – 87.6 max.	34 min. – 34 1/2 max. 86.4 min. – 87.6 max.
Width	18 / 45.7	15 / 38.1
Depth	24 / 61	24 / 61


*Leveling legs fully extended.

PRODUCT DIMENSIONS

18-Inch/45.7 cm

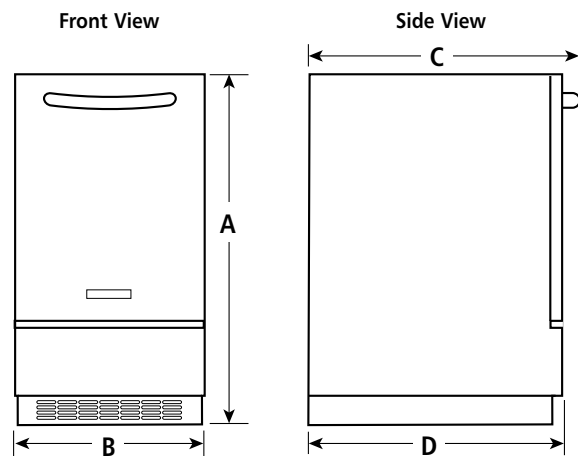


15-Inch/38.1 cm

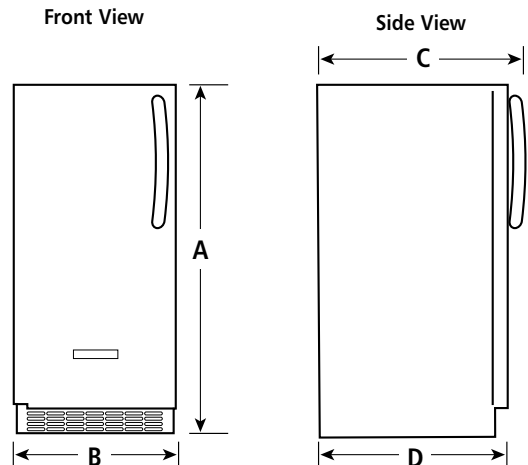

Freestanding Gas Ranges


PRODUCT DIMENSIONS

KGRS308X, KGRS208X, KGRS206X

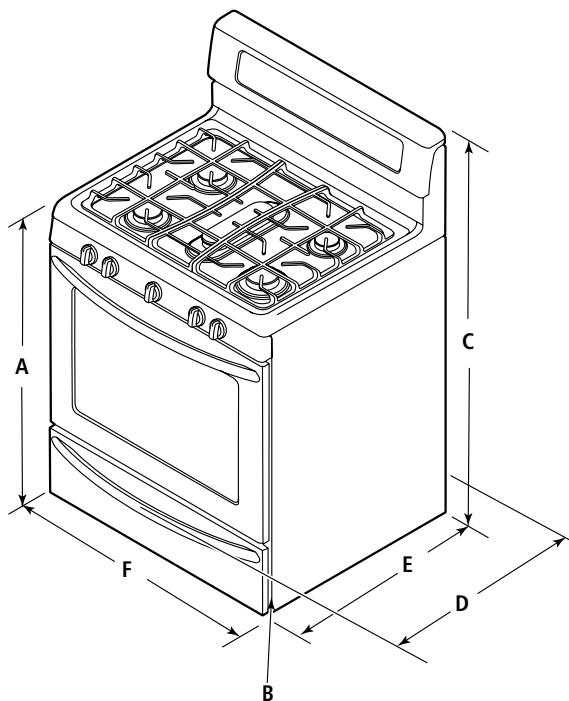

- A. 36" $\pm$ 1/8" (91.44 cm $\pm$.32 cm) cooktop surface height with leveling legs screwed all the way in*
- B. Model/serial rating plate (located behind the warming/storage drawer)
- C. 48 1/2" (123.2 cm) max. overall height with leveling legs screwed all the way in*
- D. 28 7/16" (72.2 cm) depth with handle
- E. 25 3/4" (65.4 cm) depth without handle
- F. 29 7/8" (75.9 cm) overall width

*Range can be raised approximately 3/4" (1.9 cm) by adjusting the leveling legs.




Anti-tip bracket:

Anti-tip bracket must be securely mounted to subfloor and wall. Thickness of flooring may require longer screws to anchor bracket to subfloor. Longer screws are available from your local hardware store.

Freestanding Dual Fuel & Gas Ranges

PRODUCT DIMENSIONS

YKDRS807S, KGRS807S

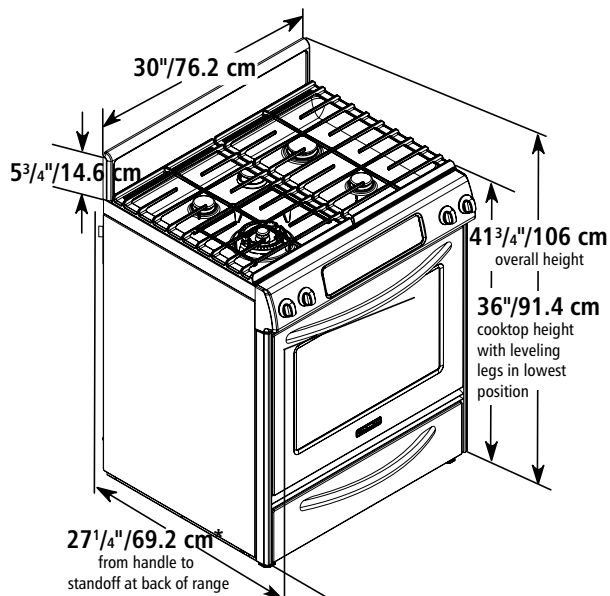

*When installed in a 24" (61 cm) base cabinet with 25" (63.5 cm) countertop, front of oven door protrudes 1" (2.54 cm) beyond 24" (61 cm) base cabinet.

Anti-tip bracket:


Anti-tip bracket must be securely mounted to subfloor. Thickness of flooring may require longer screws to anchor bracket to subfloor. Longer screws are available from your local hardware store.



Freestanding Dual Fuel Double Oven Range

PRODUCT DIMENSIONS

KDRS505X

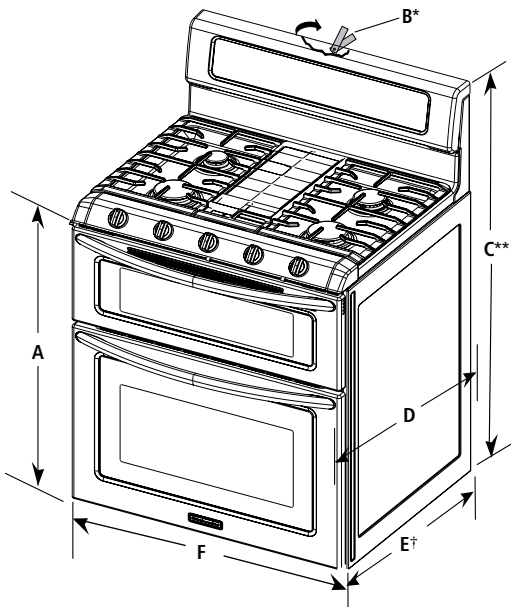


- A. $35\frac{3}{4}'' \pm \frac{1}{8}''$ min. (90.8 cm $\pm$ 0.32 cm min.) cooktop height with leveling legs screwed all the way in
- B. Model/serial/rating plates (located behind the control panel)*
- C. $47\frac{1}{8}'' \pm \frac{1}{8}''$ min. (119.7 cm $\pm$ 0.32 cm min.) overall height with leveling legs screwed all the way in**
- D. $28\frac{1}{2}'' \pm \frac{1}{4}''$ (72.4 cm $\pm$ 0.635 cm) depth with handles
- E. KDRS505X: $26\frac{1}{8}'' \pm \frac{1}{8}''$ (56.2 cm $\pm$ 0.32 cm)†
- F. $29\frac{15}{16}'' \pm \frac{1}{16}''$ (76 cm $\pm$ 0.16 cm) width

*Model/serial/rating plates may be rotated up from behind the control panel for viewing from the front of the range.

**Range can be raised approximately 1" (2.54 cm) by adjusting the leveling legs.

†Excludes handles. Dimension given is from wall to front of oven doors and will vary based on electrical outlet receptacle installation.




Anti-tip bracket:

Anti-tip bracket must be securely mounted to subfloor or wall. Thickness of flooring may require longer screws to anchor bracket to subfloor. Longer screws are available from your local hardware store.

Slide-In Dual Fuel & Gas Ranges

PRODUCT DIMENSIONS


YKDSS907S, KGSS907S, KGSK901S

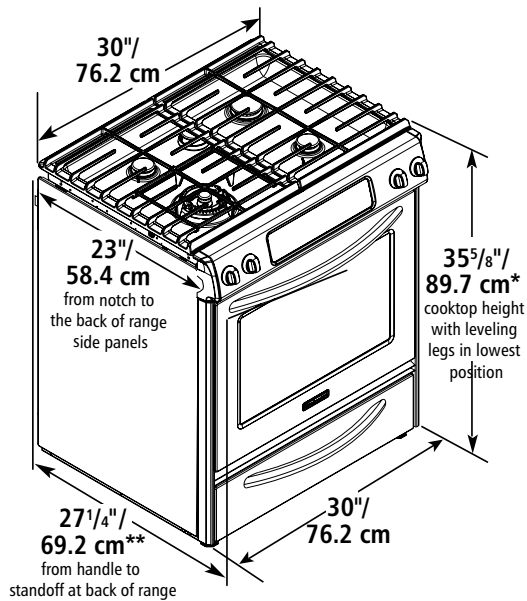

*Range can be raised approximately 1" (2.54 cm) by adjusting the leveling legs.

**When installed in a 24" (61 cm) base cabinet with 25" (63.5 cm) countertop, front of oven door protrudes 1 3/4" (4.4 cm) beyond 24" (61 cm) base cabinet.


COUNTERTOP PREPARATION

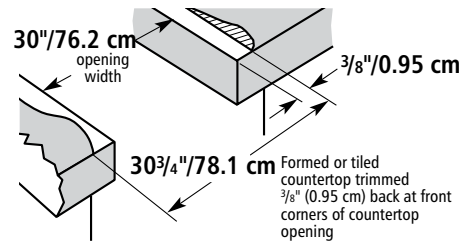

Countertop must be level. Place level on countertop – first side-to-side, then front-to-back. If countertop is not level, range will not be level. Oven must be level for satisfactory baking conditions.


Anti-tip bracket:

Anti-tip bracket must be securely mounted to subfloor. Thickness of flooring may require longer screws to anchor bracket to subfloor. Longer screws are available from your local hardware store.



CUTOUT DIMENSIONS

Cabinet opening dimensions shown are for 25" (63.5 cm) countertop depth, 24" (61 cm) base cabinet depth, and 36" (91.4 cm) countertop height.

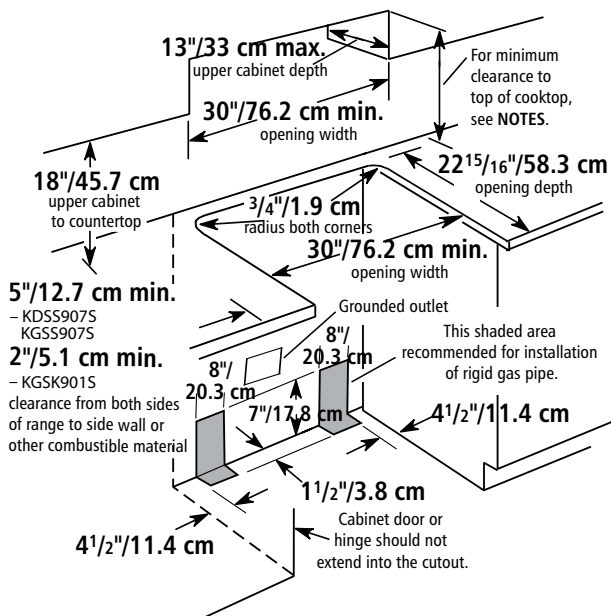

NOTES: 24" (61 cm) minimum clearance when bottom of wood or metal cabinet is covered by not less than 1/4" (0.635 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.038 cm) stainless steel, 0.024" (0.06 cm) aluminum, or 0.020" (0.05 cm) copper.


30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

If installing a hood or microwave hood combination above the range, follow hood or microwave hood combination installation instructions for dimensional clearances above the cooking surface.


Freestanding Electric Ranges

PRODUCT DIMENSIONS

YKERS308X, YKERS208X, YKERS206X

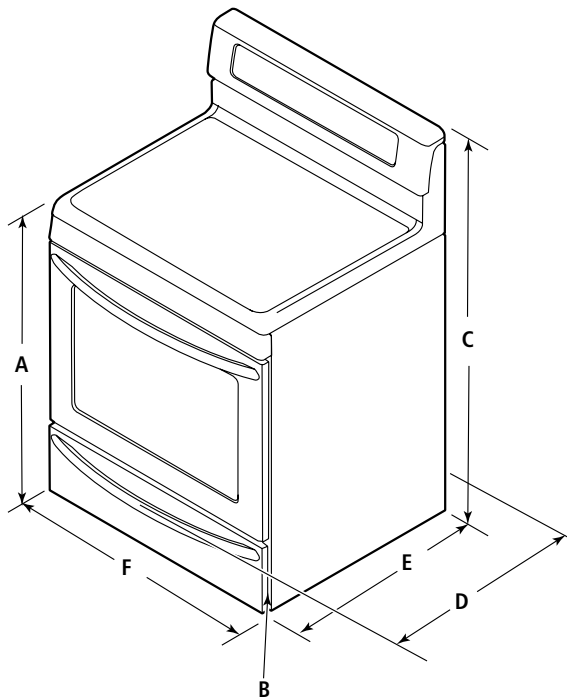

- A. 35 $\frac{3}{4}$ " (90.8 cm) min. cooktop height with leveling legs screwed all the way in*
 - B. Model/serial rating plate (located behind the warming/storage drawer)
 - C. 47 $\frac{3}{4}$ " (121.3 cm) min. overall height with leveling legs screwed all the way in*
 - D. YKERS206X: 29 $\frac{7}{16}$ " (74.8 cm) depth with handle
YKERS208X, YKERS308X: 28 $\frac{7}{16}$ " (72.2 cm) depth with handle
 - E. 25 $\frac{3}{4}$ " (65.4 cm) depth without handle
 - F. 29 $\frac{7}{8}$ " (75.9 cm) overall width
- *Range can be raised approximately $\frac{3}{4}$ " (1.9 cm) by adjusting the leveling legs.




Anti-tip bracket:


Anti-tip bracket must be securely mounted to subfloor and wall. Thickness of flooring may require longer screws to anchor bracket to subfloor. Longer screws are available from your local hardware store.

PRODUCT DIMENSIONS

YKERS8075

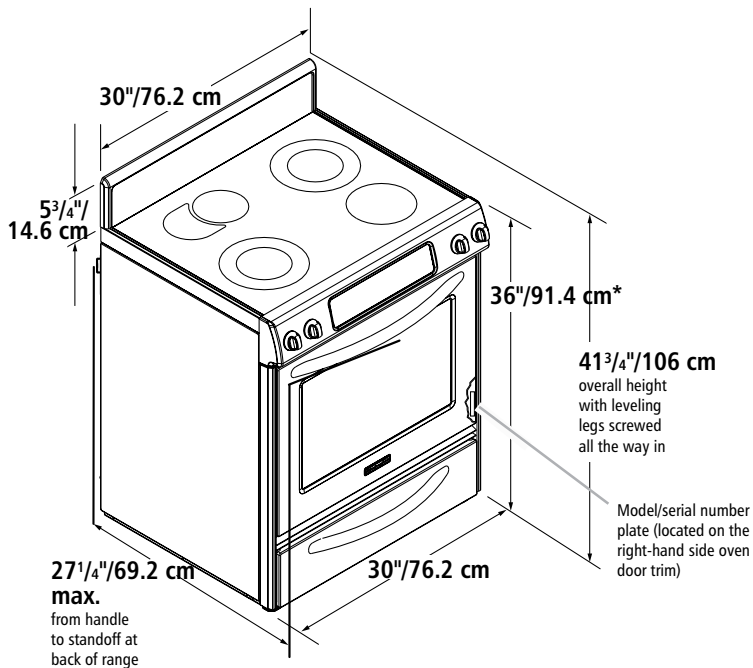

*With leveling legs lowered 1 $\frac{1}{2}$ turns.




Anti-tip bracket:

Anti-tip bracket must be securely mounted to subfloor or wall. Thickness of flooring may require longer screws to anchor bracket to subfloor. Longer screws are available from your local hardware store.

Freestanding Electric Double Oven Ranges

PRODUCT DIMENSIONS

YKER507X

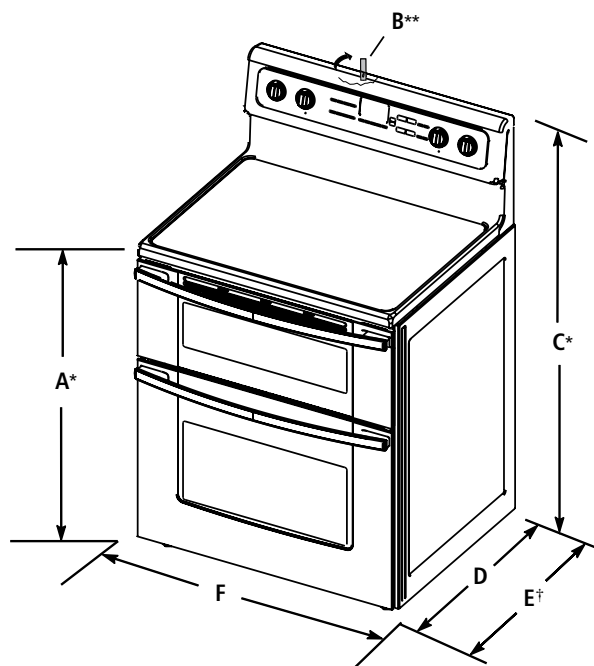


- A. $35\frac{3}{4}" \pm \frac{1}{8}"$ min. (90.8 cm $\pm$ 0.32 cm min.) cooktop height with leveling legs screwed all the way in
- B. Model/serial/rating plates (located behind the control panel)*
- C. $47\frac{1}{8}" \pm \frac{1}{8}"$ min. (119.7 cm $\pm$ 0.32 cm min.) overall height with leveling legs screwed all the way in**
- D. $28\frac{1}{2}" \pm \frac{1}{4}"$ (72.4 cm $\pm$ 0.635 cm) depth with handles
- E. $26\frac{1}{8}" \pm \frac{1}{8}"$ (56.2 cm $\pm$ 0.32 cm)†
- F. $29\frac{5}{16}" \pm \frac{1}{16}"$ (76 cm $\pm$ 0.16 cm) width

*Range can be raised approximately 1" (2.54 cm) by adjusting the leveling legs.

**Model/serial/rating plates may be rotated up from behind the control panel for viewing from the front of the range.

†Excludes handles. Dimension given is from wall to front of oven doors and will vary based on electric outlet receptacle installation.




Anti-tip bracket:

Anti-tip bracket must be securely mounted to subfloor or wall. Thickness of flooring may require longer screws to anchor bracket to subfloor. Longer screws are available from your local hardware store.

Slide-In Electric Ranges

PRODUCT DIMENSIONS


YKESS908S, YKESS907

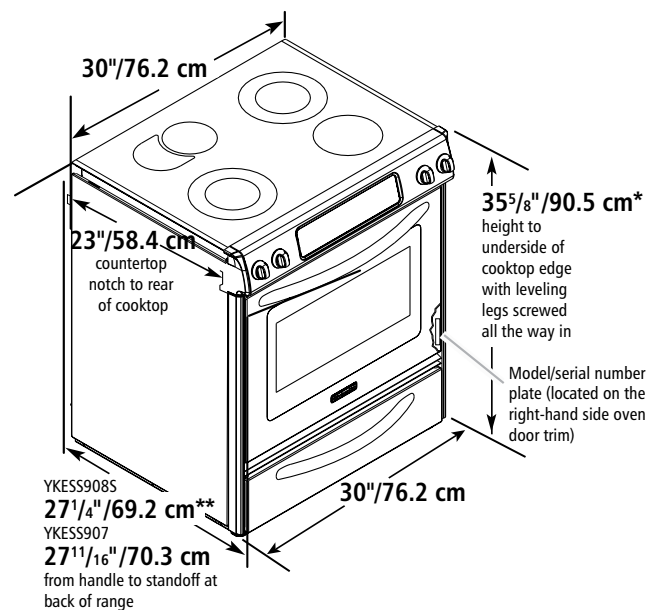

*Range can be raised approximately 1" (2.54 cm) by adjusting the leveling legs.

**When installed in a 24" (61 cm) base cabinet with 25" (63.5 cm) countertop, front of oven door protrudes 1 $\frac{3}{4}"$ (4.4 cm) beyond 24" (61 cm) base cabinet.

COUNTERTOP PREPARATION

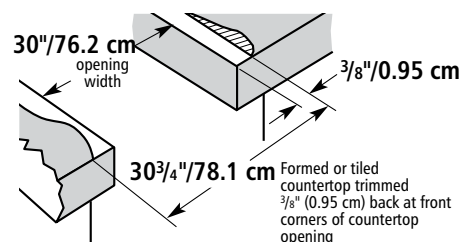

Countertop must be level. Place level on countertop – first side-to-side, then front-to-back. If countertop is not level, range will not be level. Oven must be level for satisfactory baking conditions.

Anti-tip bracket:


Anti-tip bracket must be securely mounted to subfloor. Thickness of flooring may require longer screws to anchor bracket to subfloor. Longer screws are available from your local hardware store.



Commercial-Style Dual Fuel Ranges

PRODUCT DIMENSIONS


KDRU767V, KDRU707V, KDRS467V, KDRS407V

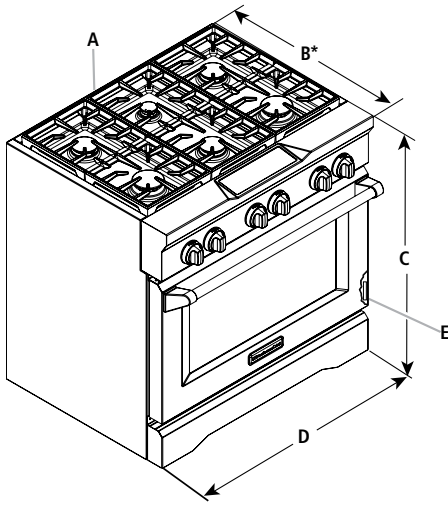

- A. Optional backguard may be installed
- B. 27 $\frac{3}{4}$ " (70.5 cm) depth with control panel
- C. 35 $\frac{3}{4}$ " (90.8 cm) cooktop height when setting on the wheels
- D. Width
36-Inch (91.4 cm) Models: 36" (91.4 cm)
30-Inch (76.2 cm) Models: 30" (76.2 cm)
- E. Model/serial rating plate location

*When installed in a 24" (61 cm) base cabinet with 25" (63.5 cm) countertop, front of oven door protrudes 1 $\frac{1}{8}$ " (4.8 cm) beyond 24" (61 cm) base cabinet.

CUTOUT DIMENSIONS

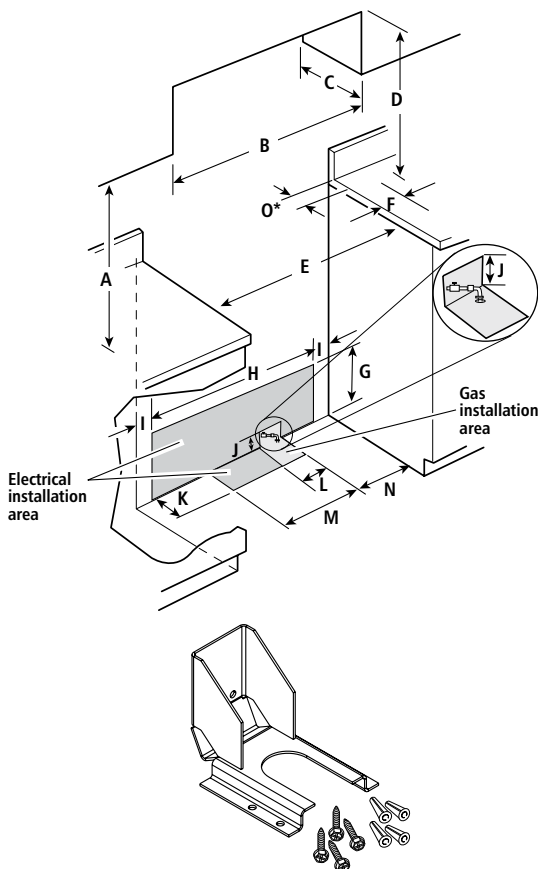

- A. 18" (45.7 cm) upper cabinet to countertop
- B. Min. upper cabinet width
36-Inch (91.4 cm) Models: 36" (91.4 cm)
30-Inch (76.2 cm) Models: 30" (76.2 cm)
- C. 13" (33 cm) max. upper cabinet depth
- D. Min. clearance between top of cooking platform and bottom of uncovered wood or metal cabinet
36-Inch (91.4 cm) Models: 42" (106.7 cm)
30-Inch (76.2 cm) Models: 30" (76.2 cm)
- E. 36-Inch (91.4 cm) Models: 36" (91.4 cm)
30-Inch (76.2 cm) Models: 30" (76.2 cm)
- F. 6" (15.2 cm) min. clearance from both sides of range to side wall or other combustible material
- G. 15" (38.1 cm)
- H. 36-Inch (91.4 cm) Models: 28" (71.1 cm)
30-Inch (76.2 cm) Models: 22" (55.9 cm)
- I. 1 $\frac{1}{2}$ " (3.8 cm)
- J. 3" (7.6 cm)
- K. 5" (12.7 cm)
- L. 36-Inch (91.4 cm) Models: 14" (35.6 cm)
30-Inch (76.2 cm) Models: 6" (15.2 cm)
- M. 10 $\frac{1}{2}$ " (26.7 cm)
- N. 6" (15.2 cm)
- O. 3" (7.6 cm)*

*If back wall is constructed of a combustible material and a backguard is not installed, a 6" (15.2 cm) minimum clearance is required for all ranges.

Important Installation Information Regarding the Steam Function

The steam function on select ranges is configured for direct plumbing to a nearby water supply. Included with the product are the water filter housing, one water filter, a small section of copper tubing at the back of the range, and a water supply union to attach the copper tubing to the water supply line. Water supply lines are not included. The water filtration system should be installed upright and adjacent to the range near the cold water supply pipe under the kitchen sink.

See Installation Instructions for complete details.

Anti-tip bracket:

Anti-tip bracket must be securely mounted to subfloor or wall. Thickness of flooring may require longer screws to anchor bracket to subfloor. Longer screws are available from your local hardware store.


Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

Built-In Single Ovens


DIMENSIONS – shown in inches/cm

MODEL NO.	30-INCH/76.2 CM KEBU107S	30-INCH/76.2 CM KEBS107S KEBK101S	27-INCH/68.6 CM KEBS177S KEBK171S	24-INCH/61 CM KEBC147V
PRODUCT DIMENSIONS				
Recessed Width (A)	28 ⁵ / ₁₆ / 71.9	28 ⁵ / ₁₆ / 71.9	25 ⁵ / ₁₆ / 64.3	22 ³ / ₈ / 56.8
Overall Height (B)	28 ³ / ₄ / 73	28 ³ / ₄ / 73	28 ³ / ₄ / 73	29 / 73.7
Overall Width (C)	29 ³ / ₄ / 75.6	29 ³ / ₄ / 75.6	26 ³ / ₄ / 67.9	23 ³ / ₄ / 60.3
Recessed Depth (D)	23 / 58.4	23 / 58.4	23 / 58.4	23 / 58.4
Recessed Height (E)	27 ¹ / ₂ / 69.9	27 ¹ / ₂ / 69.9	27 ¹ / ₂ / 69.9	27 ¹ / ₂ / 69.9
CUTOUT DIMENSIONS				
Width (F)	28 ¹ / ₂ / 72.4	28 ¹ / ₂ / 72.4	25 ¹ / ₂ / 64.8	22 ¹ / ₂ / 57.2
Height (G)	27 ³ / ₄ / 70.5	27 ³ / ₄ / 70.5	27 ³ / ₄ / 70.5	27 ³ / ₄ / 70.5
Depth (H)	23 / 58.4	23 / 58.4	23 / 58.4	23 ¹ / ₄ / 59


PRODUCT DIMENSIONS

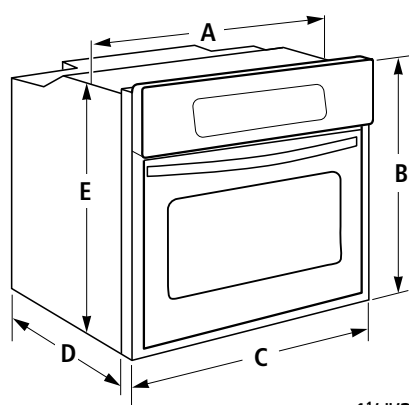

CUTOUT DIMENSIONS

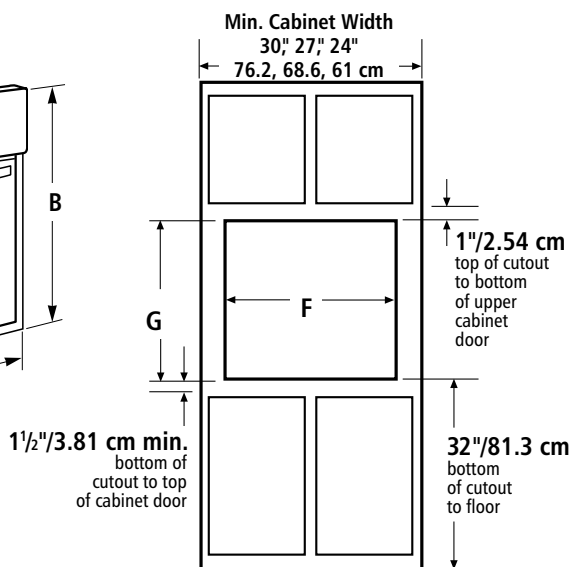


Cabinet Side View



Important Installation Information Regarding the Steam Function

The steam function on this oven is configured for direct plumbing to a nearby water supply. Included with the product are the water filter housing, one water filter, a small section of copper tubing at the back of the oven, and a water supply union to attach the copper tubing to the water supply line. Water supply lines are not included. The water filtration system should be installed upright and adjacent to the oven near the cold water supply pipe under the kitchen sink. See Installation Instructions for complete details.

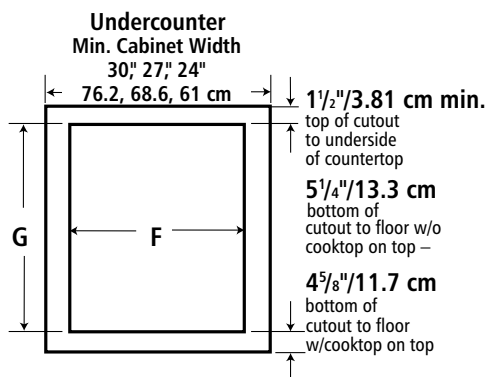

LOCATION REQUIREMENTS

Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the oven is installed in a wall cabinet. A 1" (2.54 cm) minimum diameter hole should have been drilled in the right rear or left rear corner of the support surface to pass the appliance cable through to the junction box.


NOTE: For undercounter installation, it is recommended that the junction box be located in the adjacent right or left cabinet. If you are installing the junction box on rear wall behind oven, the junction box must be recessed and located in the upper or lower right or left corner of the cabinet; otherwise, the oven will not fit into the cabinet opening.

Built-In Double Ovens


DIMENSIONS – shown in inches/cm

MODEL NO.	30-INCH/76.2 CM KEBU208S	30-INCH/76.2 CM KEBS208S	27-INCH/68.6 CM KEBS278S	24-INCH/61 CM KEBC247V
PRODUCT DIMENSIONS				
Recessed Width (A)	28 ⁵ / ₁₆ / 71.9	28 ⁵ / ₁₆ / 71.9	25 ⁵ / ₁₆ / 64.3	22 ³ / ₈ / 56.8
Overall Height (B)	50 ³ / ₄ / 128.9	50 ³ / ₄ / 128.9	50 ³ / ₄ / 128.9	51 / 129.5
Overall Width (C)	29 ³ / ₄ / 75.6	29 ³ / ₄ / 75.6	26 ³ / ₄ / 67.9	23 ³ / ₄ / 60.3
Recessed Depth (D)	23 / 58.4	23 / 58.4	23 / 58.4	23 / 58.4
Recessed Height (E)	49 ⁹ / ₁₆ / 126.9	49 ⁹ / ₁₆ / 126.9	49 ⁹ / ₁₆ / 126.9	49 ¹ / ₂ / 125.7
CUTOUT DIMENSIONS				
Width (F)	28 ¹ / ₂ / 72.4	28 ¹ / ₂ / 72.4	25 ¹ / ₂ / 64.8	22 ¹ / ₂ / 57.2
Height (G)	49 ³ / ₄ / 126.4	49 ³ / ₄ / 126.4	49 ³ / ₄ / 126.4	49 ³ / ₄ / 126.4
Depth (H)	23 / 58.4	23 / 58.4	23 / 58.4	23 ¹ / ₄ / 59


PRODUCT DIMENSIONS

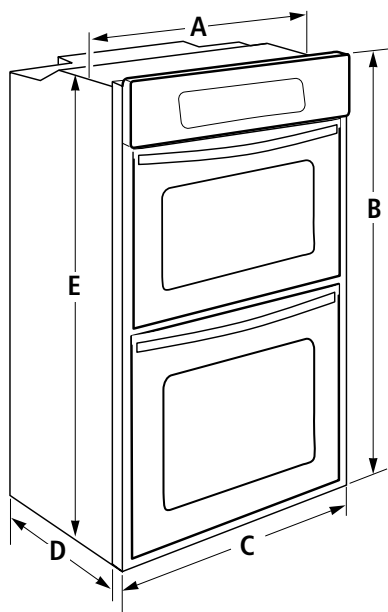

CUTOUT DIMENSIONS

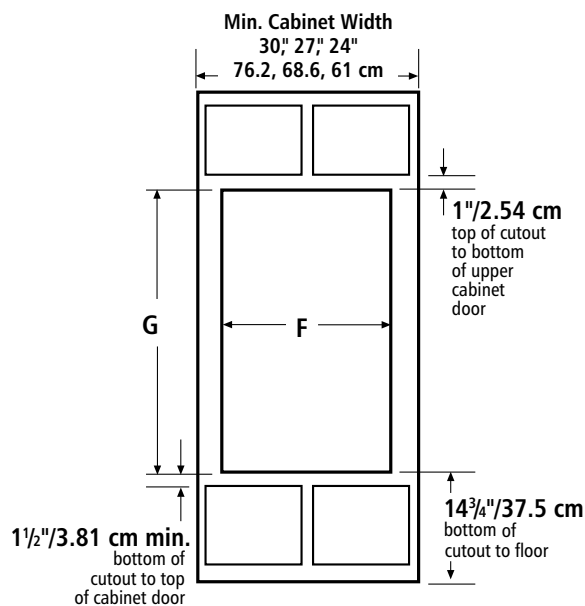

Cabinet Side View



Important Installation Information Regarding the Steam Function

The steam function on this oven is configured for direct plumbing to a nearby water supply. Included with the product are the water filter housing, one water filter, a small section of copper tubing at the back of the oven, and a water supply union to attach the copper tubing to the water supply line. Water supply lines are not included. The water filtration system should be installed upright and adjacent to the oven near the cold water supply pipe under the kitchen sink. See Installation Instructions for complete details.

LOCATION REQUIREMENTS


Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the oven is installed in a wall cabinet. A 1" (2.54 cm) minimum diameter hole should have been drilled in the right rear or left rear corner of the support surface to pass the appliance cable through to the junction box.

Built-In Combination Ovens


DIMENSIONS – shown in inches/cm

MODEL NO.	30-INCH/76.2 CM		27-INCH/68.6 CM
	KEHU309S	KEMS308S	KEMS378S
PRODUCT DIMENSIONS			
Recessed Width (A)	28 ⁵ / ₁₆ / 71.9	28 ⁵ / ₁₆ / 71.9	25 ⁵ / ₁₆ / 64.3
Overall Height (B)	42 ⁵ / ₁₆ / 107.5	42 ⁵ / ₁₆ / 107.5	42 ⁵ / ₁₆ / 107.5
Overall Width (C)	29 ³ / ₄ / 75.6	29 ³ / ₄ / 75.6	26 ³ / ₄ / 67.9
Recessed Depth (D)	23 / 58.4	23 / 58.4	23 / 58.4
Recessed Height (E)	40 ³ / ₄ / 103.5	40 ³ / ₄ / 103.5	40 ³ / ₄ / 103.5
CUTOUT DIMENSIONS			
Width (F)	28 ¹ / ₂ / 72.4	28 ¹ / ₂ / 72.4	25 ¹ / ₂ / 64.8
Height (G)	41 ¹ / ₄ / 104.8	41 ¹ / ₄ / 104.8	41 ¹ / ₄ / 104.8
Depth (H)	23 / 58.4	23 / 58.4	23 / 58.4


PRODUCT DIMENSIONS

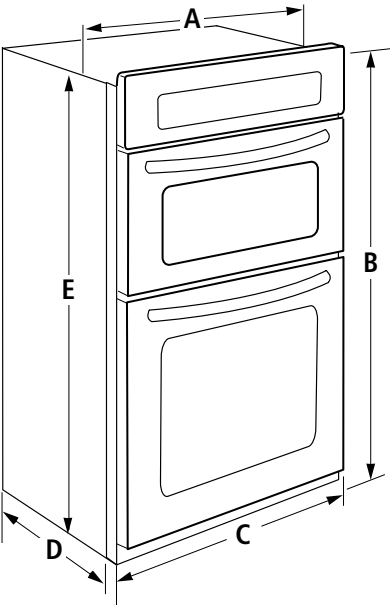

CUTOUT DIMENSIONS

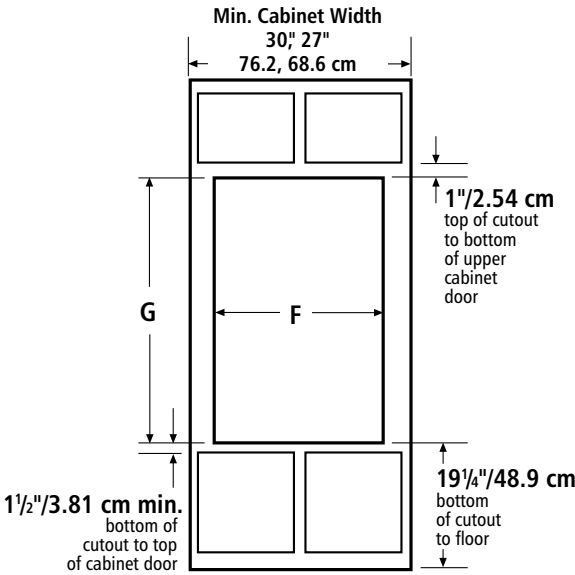

Cabinet Side View



Important Installation Information
Regarding the Steam Function

The steam function on this oven is configured for direct plumbing to a nearby water supply. Included with the product are the water filter housing, one water filter, a small section of copper tubing at the back of the oven, and a water supply union to attach the copper tubing to the water supply line. Water supply lines are not included. The water filtration system should be installed upright and adjacent to the oven near the cold water supply pipe under the kitchen sink. See Installation Instructions for complete details.

LOCATION REQUIREMENTS

Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the oven is installed in a wall cabinet. A 1" (2.54 cm) minimum diameter hole should have been drilled in the right rear or left rear corner of the support surface to pass the appliance cable through to the junction box.

Gas Cooktops


DIMENSIONS – shown in inches/cm

MODEL NO.	36-INCH/91.4 CM		30-INCH/76.2 CM			
	KFGU766V	KFGS366V	KFGU706V	KFGS306V	KGCK306V	KGCC506R
PRODUCT DIMENSIONS						
Width – Widest Point (A)	36 ¹ / ₄ / 92	36 ¹ / ₄ / 92	30 ³ / ₁₆ / 76.7	30 ³ / ₁₆ / 76.7	31 ⁷ / ₁₆ / 79.9	30 ³ / ₁₆ / 76.7
Depth (B)	21 / 53.3	21 / 53.3	21 / 53.3	21 / 53.3	21 ¹ / ₄ / 54	20 ³ / ₁₆ / 51.6
Burner Box Height* (C)	3 / 7.6	3 / 7.6	3 / 7.6	3 / 7.6	2 ⁷ / ₈ / 7.3	2 ⁷ / ₈ / 7.3
CUTOUT DIMENSIONS						
Width (D)	35 ¹ / ₄ / 89.5	35 ¹ / ₄ / 89.5	29 / 73.7	29 / 73.7	29 / 73.7	29 / 73.7
Depth (E)	20 / 50.8	20 / 50.8	20 / 50.8	20 / 50.8	19 / 48.3	19 / 48.3
Minimum Clearance to Rear Combustible Surface (F)	2 ⁷ / ₈ / 7.3	2 ⁷ / ₈ / 7.3	2 ⁷ / ₈ / 7.3	2 ⁷ / ₈ / 7.3	2 ⁷ / ₈ / 7.3	2 ⁷ / ₈ / 7.3
Minimum Clearance to Combustible Side Wall – Both Sides (G)	8 / 20.3**	8 / 20.3**	8 / 20.3**	8 / 20.3**	8 ³ / ₈ / 21.3	8 ³ / ₈ / 21.3
Minimum to Countertop Front Edge (H)	1 ¹ / ₈ / 2.9	1 ¹ / ₈ / 2.9	1 ¹ / ₈ / 2.9	1 ¹ / ₈ / 2.9	2 ¹ / ₈ / 5.4	2 ¹ / ₈ / 5.4


*Power/fuel supply/vent connections extend below cooktop and are not included in burner height dimensions.

**The combined distance from the left and right sidewalls must be a minimum of 48" (121.9 cm).

PRODUCT DIMENSIONS

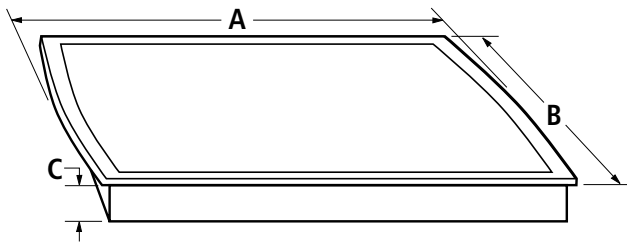

CUTOUT DIMENSIONS

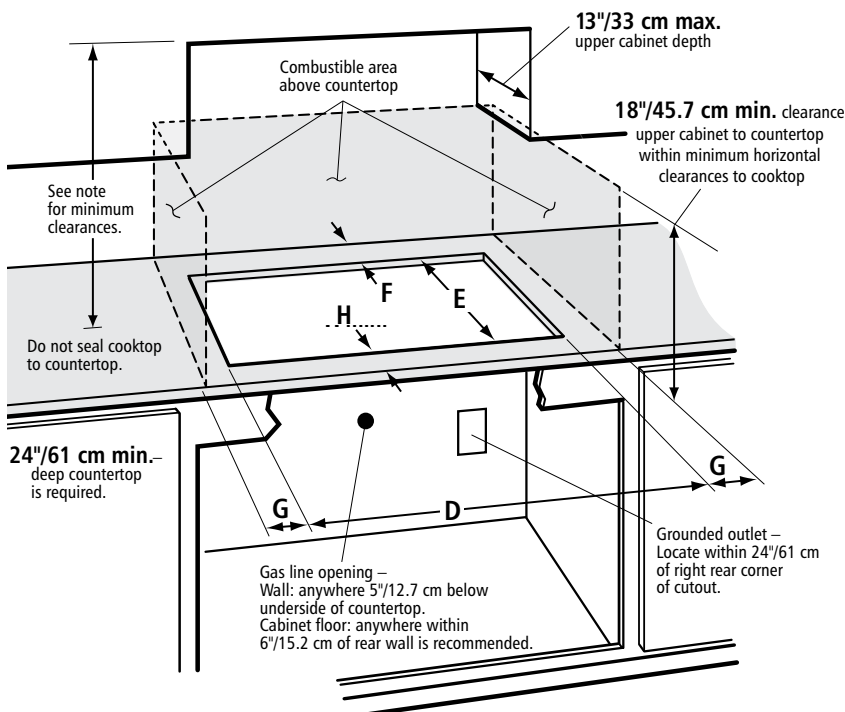

NOTES: 24" (61 cm) minimum clearance when bottom of wood or metal cabinet is covered by not less than 1/4" (0.635 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.038 cm) stainless steel, 0.024" (0.06 cm) aluminum, or 0.020" (0.05 cm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

If installing a hood or microwave hood combination above the range, follow hood or microwave hood combination installation instructions for dimensional clearances above the cooking surface.

Gas Cooktop & Built-In Oven Combination

APPROVED MODEL NUMBER COMBINATIONS

GAS COOKTOPS*


KFGU766V, KFGS366V, KFGU706V, KFGS306V, KGCK306V, KGCC506R

BUILT-IN OVENS

KEBU107S, KEBS107S, KEBK101S, KEBS177S, KEBK171S, KEBC147V

*Cooktops should not be placed over a built-in oven without installing the heat shield that is shipped with the product. See Installation Instructions for specific information.

CUTOUT DIMENSIONS

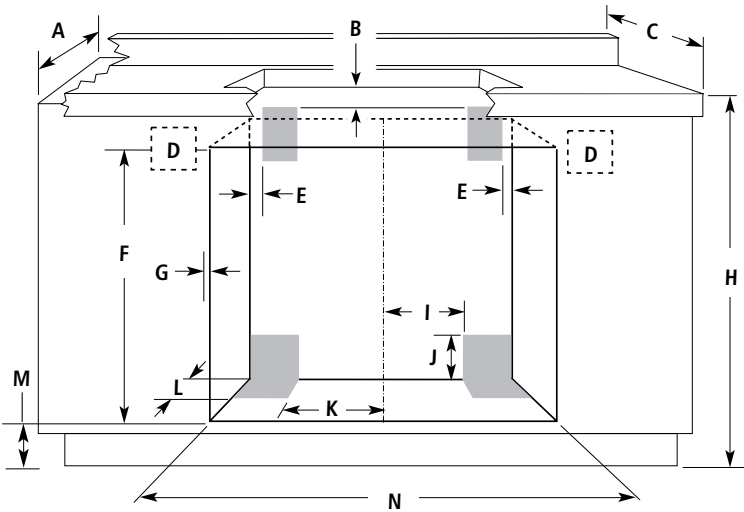

- A. 24" (61 cm) cabinet depth
- B. 1" (2.54 cm) clearance from the top of junction box to bottom of countertop
- C. 25" (63.5 cm) countertop depth
- D. Recommended oven junction box locations
- E. 1" (2.54 cm) clearance from the side of junction box to cabinet wall
- F. 27¾" (70.5 cm) minimum cutout height
- G. Allow ⅝" (1.6 cm) for oven to overlap each side
- H. 36" (91.4 cm) from cabinet base to countertop
- I. Gas line through wall 10½" (26.7 cm) to centre of cutout
- J. ¾" (8.3 cm)
- K. Gas line through floor 10½" (26.7 cm) to centre of cutout
- L. ½" (8.9 cm)
- M. 4⅝" (11.7 cm)
- N. See chart below

DIMENSIONS – shown in inches/cm


OVEN SIZE	36"/91.4	30"/76.2	27"/68.6	24"/61
Oven Cutout	34½ / 87.6	28½ / 72.4	25½ / 64.8	22½ / 57.2
Dimension				

NOTE: Lower shaded areas are recommended locations for flexible or rigid gas pipe installation. The gas pipe can be installed on either side of the cutout and either through the floor or through the wall. The shaded area not used for oven junction box is recommended for 120-volt grounded outlet for cooktop.

Commercial-Style Rangetops


PRODUCT DIMENSIONS

KGCU484V, KGCU482V, KGCU462V, KGCU467V,
KGCU407V

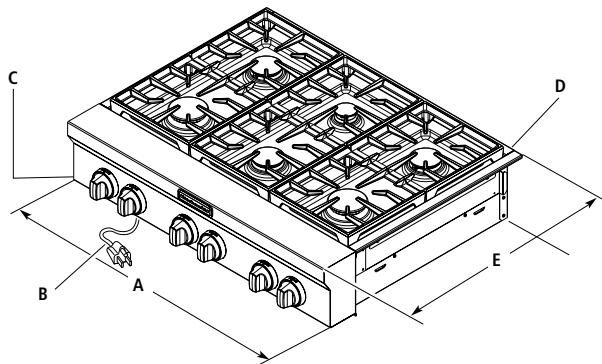

- A. 48-Inch (121.9 cm) Models: 47 $\frac{7}{8}$ " (121.6 cm)
36-Inch (91.4 cm) Models: 35 $\frac{5}{8}$ " (91.1 cm)
30-Inch (76.2 cm) Models: 29 $\frac{7}{8}$ " (75.9 cm)
- B. 36" (91.4 cm) long 3-prong grounding-type power supply cord
- C. Model/serial rating plate (located on the underside of the rangetop burner box)
- D. Island trim or optional backguard
- E. 27 $\frac{3}{4}$ " (70.5 cm)

CUTOUT DIMENSIONS

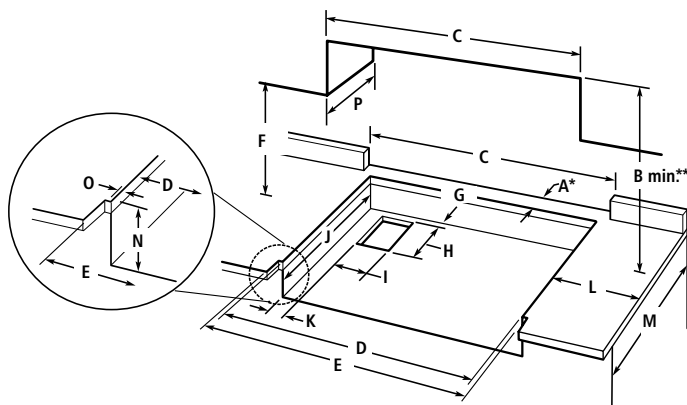

*If back wall is constructed of a combustible material and a backguard is not installed, a minimum clearance of dimension A + 6" (15.2 cm) is required for 48" (121.9 cm) rangetops and model KGCU462V.


**Dimension "B" can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is protected by not less than 0.25" (0.635 cm) flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" (0.038 cm) stainless steel, 0.024" (0.06 cm) aluminum, or 0.020" (0.05 cm) copper.

†If installing a hood above the rangetop, follow the hood instructions for dimensional clearances above the cooking surface.

†Zero clearance fit.

- A. Rangetop cutout to back wall
KGCU484V, KGCU482V,
KGCU462V: 1 $\frac{1}{2}$ " (3.8 cm)
KGCU407V, KGCU467V: 1 $\frac{3}{4}$ " (4.4 cm)
- B. Rangetop to cabinet
48-Inch (121.9 cm) Models:
42" (106.7 cm) min.
36-Inch (91.4 cm) Models:
42" (106.7 cm) min.
30-Inch (76.2 cm) Models:
30" (76.2 cm) min.
- C. Optional backguard opening
48-Inch (121.9 cm) Models:
48" (121.9 cm)
36-Inch (91.4 cm) Models:
36" (91.4 cm)
30-Inch (76.2 cm) Models:
30" (76.2 cm)
- D. Cabinet and countertop
48-Inch (121.9 cm) Models:
47 $\frac{1}{4}$ " (120 cm)
36-Inch (91.4 cm) Models:
35 $\frac{1}{4}$ " (89.5 cm)
30-Inch (76.2 cm) Models:
29 $\frac{1}{4}$ " (74.3 cm)
- E. Countertop only
48-Inch (121.9 cm) Models:
48" (121.9 cm) or (47 $\frac{7}{8}$ "/121.6 cm†)
36-Inch (91.4 cm) Models:
36" (91.4 cm) or (35 $\frac{5}{8}$ "/91.1 cm†)
30-Inch (76.2 cm) Models:
30" (76.2 cm) or (29 $\frac{7}{8}$ "/75.9 cm†)
- F. 18" (45.7 cm) min. clearance upper cabinet to countertop
- G. $\frac{3}{4}$ " (1.9 cm) back of cabinet cutout to gas opening cutout
- H. 6 $\frac{5}{8}$ " (17.5 cm) gas opening cutout depth
- I. 12 $\frac{1}{2}$ " (31.7 cm) gas opening cutout width
- J. 22 $\frac{1}{4}$ " (56.5 cm) cabinet cutout depth
- K. 2" (5.1 cm) cabinet side to gas cutout
- L. 6" (15.2 cm) min. distance on both sides of the rangetop to the side wall or other combustible material above cooking surface
- M. 24" (61 cm) cabinet depth
- N. 7 $\frac{1}{4}$ " (18.4 cm) cabinet depth to countertop
- O. Notch to be equal on both sides
- P. 13" (33 cm) upper cabinet depth

GAS AND ELECTRIC CONNECTION LINES

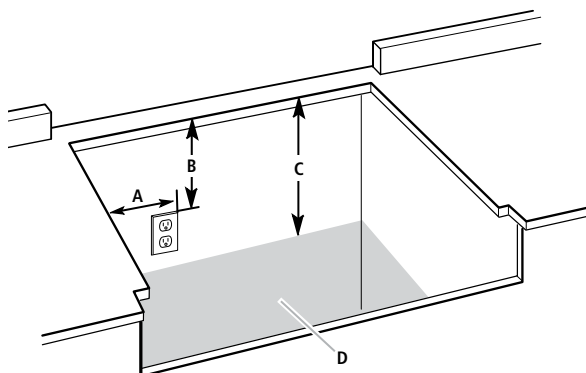


- A. Grounded 3-prong outlet should be located on left-hand side of cutout 16" (40.6 cm) max. from enclosure sidewall
 - B. 10" (25.4 cm) min. clearance from countertop to top of the outlet
 - C. 14" (35.6 cm) countertop to the gas supply line
 - D. Gas supply line should be located in this area on rear or side walls, or the supply line can come up through the floor
- NOTE: Solid side and bottom of cutout enclosure not shown.


Gas Downdraft Cooktop

PRODUCT DIMENSIONS

KGCD807X

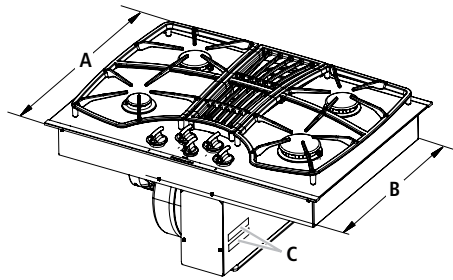


- A. KGCD807XSS: 21³⁷/₆₄" (54.8 cm)
- B. 19³/₄" (50.2 cm) screw head to screw head
- C. Model/serial rating/clearance plate location

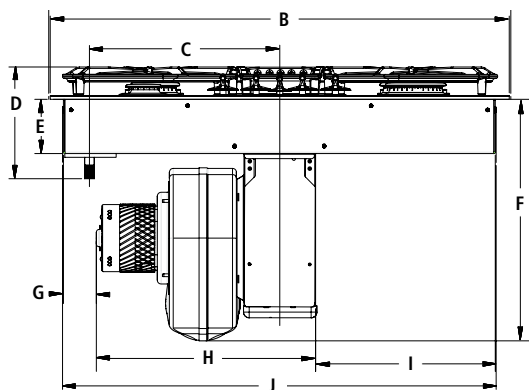

- B. KGCD807XSS: 30¹/₂" (76.3 cm)
- C. 12¹/₂" (31.7 cm) centreline of cooktop to centreline of gas manifold pipe
- D. 7⁵/₁₆" (18.6 cm)
- E. 3⁵/₈" (9.2 cm)
- F. 15" (38.1 cm)
- G. 2³/₁₆" (5.6 cm) recommended minimum cabinet to motor clearance
- H. 14³/₈" (36.5 cm)
- I. 11¹³/₁₆" (30 cm)
- J. 28⁵/₈" (72.1 cm) screw head to screw head


CUTOUT DIMENSIONS

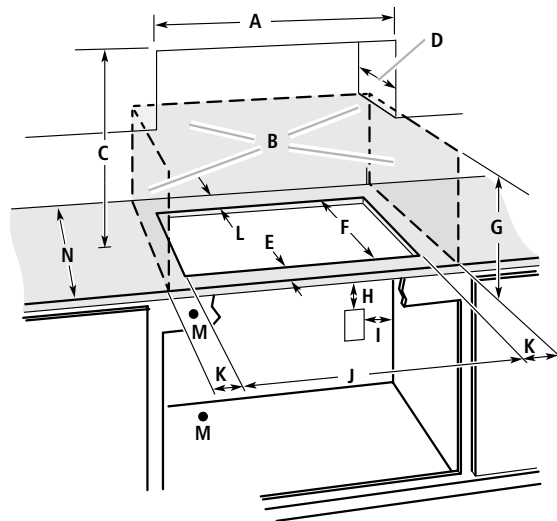

- A. 30" (76.2 cm)
- B. Combustible area above countertop (shown by dashed box)
- C. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet (24"/61 cm minimum clearance if bottom of wood or metal cabinet is covered by not less than 1/4" (0.635 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.038 cm) stainless steel, 0.024" (0.06 cm) aluminum, or 0.020" (0.05 cm) copper)
- D. 13" (33 cm) recommended upper cabinet depth
- E. 2¹/₈" (5.4 cm)
- F. 19¹⁵/₁₆" (50.6 cm)
- G. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
- H. Junction box or outlet: 12" (30.5 cm) minimum from bottom of countertop
- I. Junction box or outlet: 10" (25.4 cm) from right-hand side of cabinet
- J. 28⁵/₈" (72.7 cm)
- K. 8" (10.5 cm) minimum distance to nearest left and right side combustible surface above cooktop
- L. 2" (5.1 cm) minimum clearance between back wall and countertop
- M. Gas line opening – wall: anywhere 6" (15.2 cm) below underside of countertop on the left side; cabinet floor: anywhere within 6" (15.2 cm) of rear wall on the left side is recommended.
- N. 25" (63.5 cm) depth of countertop

NOTES: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with side walls wider than the cutout.

- A minimum side clearance of 6" (15.2 cm) is recommended between side of cooktop and side wall for maximum ventilation performance.
- A minimum clearance of 2" (5.1 cm) is recommended between the motor/blower and cabinet for proper cooling. A 6" (15.2 cm) clearance is recommended for servicing access.

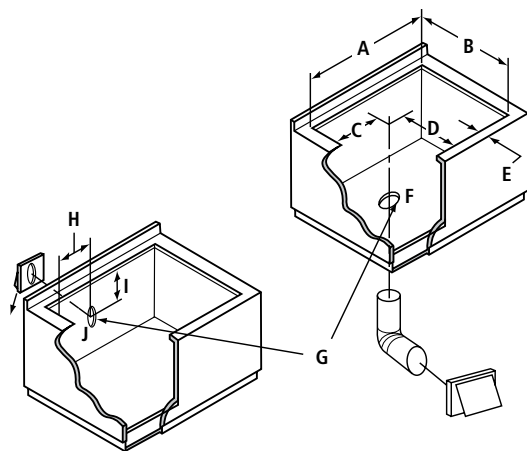


- A. 28⁵/₈" (72.7 cm) maximum
- B. 19¹⁵/₁₆" (50.6 cm) maximum
- C. 9⁹/₁₆" (23.6 cm)
- D. 6¹³/₁₆" (17.3 cm)
- E. 2¹/₈" (5.4 cm) minimum space to front edge of cooktop
- F. Floor exhaust option
- G. 6¹/₈" (15.6 cm) for 6" (15.2 cm) vent system; 5¹/₈" (13 cm) for 5" (12.7 cm) vent system
- H. 9⁵/₁₆" (23.6 cm)
- I. 13³/₈" (34 cm) from the top of the countertop surface
- J. Wall exhaust option


Electric Downdraft Cooktops

PRODUCT DIMENSIONS

KECD867X, KECD807X

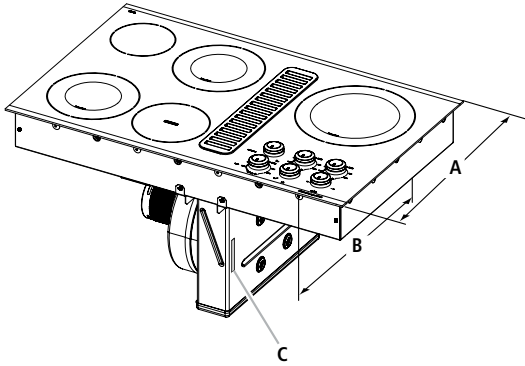


- A. KECD867XSS, KECD807XSS: 22" (55.9 cm)
- B. 21" (53.3 cm) screw head to screw head
- C. Model/serial rating/clearance plate location

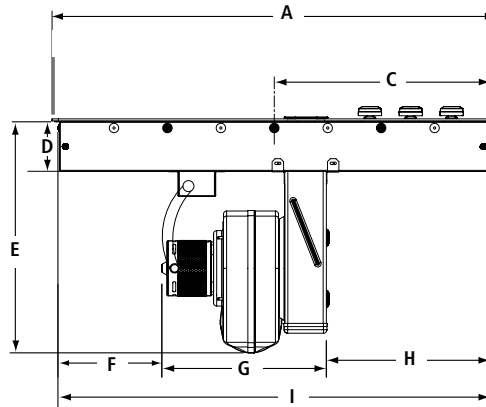

- A. KECD867XSS: 35²⁹/₆₄" (90 cm)
KECD807XSS: 30¹/₃₂" (76.3 cm)
- C. KECD867X: 17¹/₂" (44.4 cm)
KECD807X: 14⁵/₁₆" (36.3 cm)
- D. KECD867X: 3¹³/₁₆" (9.7 cm)
KECD807X: 4" (10.2 cm)
- E. 18¹³/₃₂" (46.7 cm)
- F. KECD867X: 8⁵/₁₆" (21.1 cm)
KECD807X: 1³/₈" (3.5 cm)
- G. 13¹/₈" (33.6 cm)
- H. KECD867X: 13¹/₁₆" (33.2 cm)
KECD807X: 14³/₁₆" (36 cm)
- I. Screw head to screw head
KECD867X: 34¹/₂" (87.6 cm)
KECD807X: 28⁵/₈" (72.7 cm)


CUTOUT DIMENSIONS

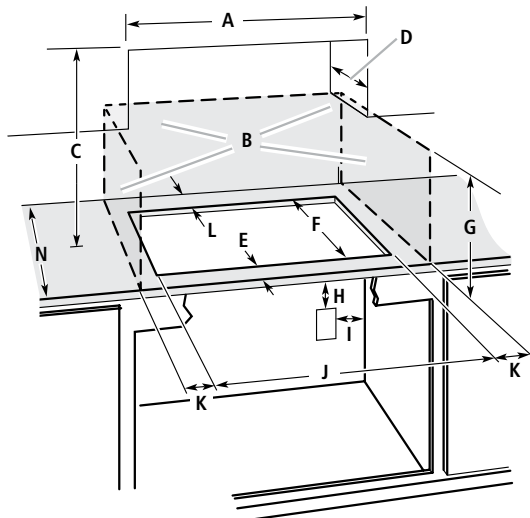

- A. KECD867X: 36" (91.4 cm)
KECD807X: 30" (76.2 cm)
- B. Combustible area above countertop (shown by dashed box)
- C. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet (24"/61 cm minimum clearance if bottom of wood or metal cabinet is covered by not less than 1/4" (0.635 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.038 cm) stainless steel, 0.024" (0.06 cm) aluminum, or 0.020" (0.05 cm) copper)
- D. 13" (33 cm) recommended upper cabinet depth
- E. 2" (5.1 cm)
- F. 21¹/₈" (53.7 cm)
- G. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
- H. Junction box or outlet: 12" (30.5 cm) minimum from bottom of countertop
- I. Junction box or outlet: 10" (25.4 cm) from right-hand side of cabinet
- J. KECD867X: 34³/₁₆" (87.8 cm)
KECD807X: 28⁷/₈" (73.3 cm)
- K. 2¹/₂" (6.3 cm) minimum distance to nearest left and right side combustible surface above cooktop
- L. 1¹/₂" (3.8 cm) minimum clearance between back wall and countertop


NOTES: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with side walls wider than the cutout.

- A minimum side clearance of 6" (15.2 cm) is recommended between side of cooktop and side wall for maximum ventilation performance.
- A minimum clearance of 2" (5.1 cm) is recommended between the motor/blower and cabinet for proper cooling. A 6" (15.2 cm) clearance is recommended for servicing access.

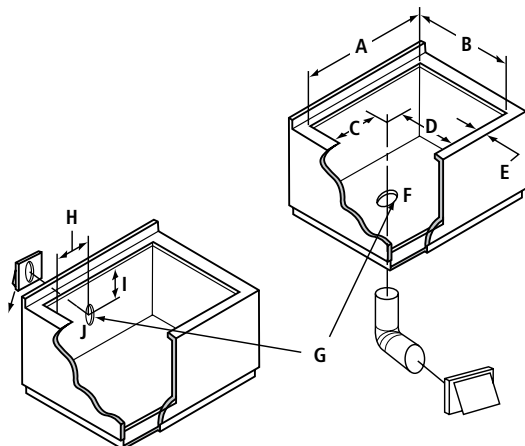


- A. KECD867X: 34³/₁₆" (87.8 cm) maximum
KECD807X: 28⁷/₈" (73.3 cm) maximum
- B. 21¹/₈" (53.7 cm) maximum
- C. KECD867X: 15¹/₁₆" (39.2 cm)
KECD807X: 8⁵/₈" (21.9 cm)
- D. 6⁵/₁₆" (16 cm)
- E. 2" (5.1 cm) minimum space to front edge of cooktop
- F. Floor exhaust option
- G. 6⁵/₈" (15.6 cm) for 6" (15.2 cm) vent system; 5¹/₈" (13 cm) for 5" (12.7 cm) vent system
- H. KECD867X: 15⁷/₁₆" (39.2 cm)
KECD807X: 8⁵/₈" (21.9 cm)
- I. 16" (40.6 cm)
- J. Wall exhaust option

KICU569X, KICU509X

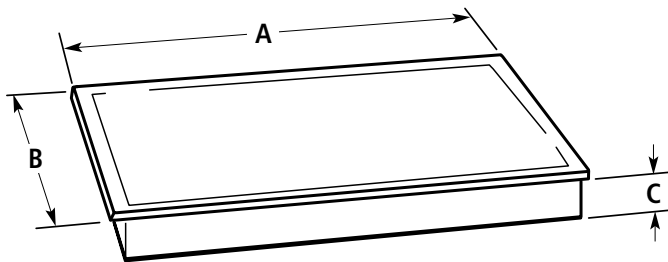

- A. KICU569X: $36\frac{5}{16}"$ (92.2 cm)
KICU509X: $30\frac{3}{4}"$ (78.1 cm)
B. $21\frac{5}{16}"$ (54.1 cm)
C. $3\frac{3}{32}"$ (7.9 cm)

CUTOUT DIMENSIONS

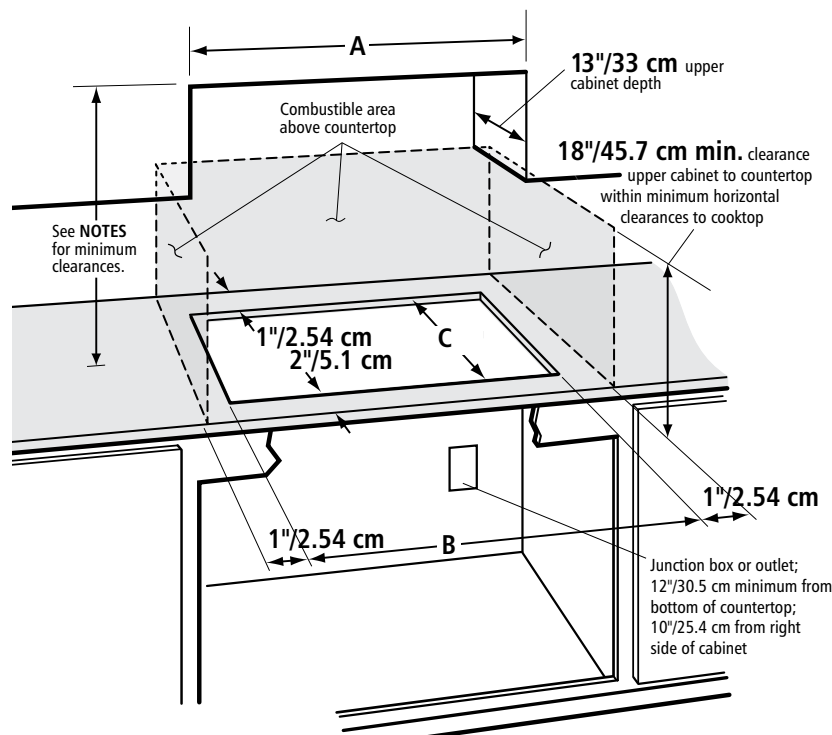

- A. KICU569X: 36" (91.4 cm)
KICU509X: 30" (76.2 cm)
- B. KICU569X: 35½" (90.2 cm)
KICU509X: 29¹⁷/₃₂" (75 cm)
- C. KICU569X: 20½" (52.1 cm)
KICU509X: 19⁵/₁₆" (49 cm)

If installing a hood or microwave hood combination above the range, follow hood or microwave hood combination installation instructions for dimensional clearances above the cooking surface.

Electrical Requirements:

A 4-wire or 3-wire, single phase, 240 volt, 60 Hz., AC only electrical supply is required on a separate, 50-amp circuit (36"/91.4 cm model) or 40-amp circuit (30"/76.2 cm model), fused on both sides of the line.


Electric Cooktops

DIMENSIONS – shown in inches/cm


MODEL NO.	36-INCH/91.4 CM KECC568R	30-INCH/76.2 CM KECC508R	30-INCH/76.2 CM KECC507R	30-INCH/76.2 CM KECC506R	15-INCH/38.1 CM KECC056R
PRODUCT DIMENSIONS					
Width (A)	36 ¹ / ₁₆ / 92.2	30 ³ / ₁₆ / 77	30 ³ / ₁₆ / 77	30 ³ / ₁₆ / 77	16 ¹ / ₁₆ / 42.1
Depth (B)	21 ¹ / ₁₆ / 54.1	21 ¹ / ₁₆ / 54.1	21 ¹ / ₁₆ / 54.1	21 ¹ / ₁₆ / 54.1	21 ¹ / ₁₆ / 54.1
Burner Box Height* (C)	2 ⁷ / ₈ / 7.3	2 ⁷ / ₈ / 7.3	2 ⁷ / ₈ / 7.3	2 ⁷ / ₈ / 7.3	2 ⁷ / ₈ / 7.3
CUTOUT DIMENSIONS					
Cutout Width (D)	35 ¹ / ₂ / 90.2	29 ¹ / ₂ / 74.9	29 ¹ / ₂ / 74.9	29 ¹ / ₂ / 74.9	14 ¹ / ₂ / 36.8
Cutout Depth (E)	20 ¹ / ₂ / 52.1	20 ¹ / ₂ / 52.1	20 ¹ / ₂ / 52.1	20 ¹ / ₂ / 52.1	20 ¹ / ₂ / 52.1
Minimum Clearance to Side Wall – Both Sides (F)	1 / 2.54	1 / 2.54	1 / 2.54	1 / 2.54	1 / 2.54
Minimum to Countertop Front Edge (G)	2 / 5.1	2 / 5.1	2 / 5.1	2 / 5.1	2 / 5.1

*Power/fuel supply/vent connections extend below cooktop and are not included in burner box height dimensions.

PRODUCT DIMENSIONS

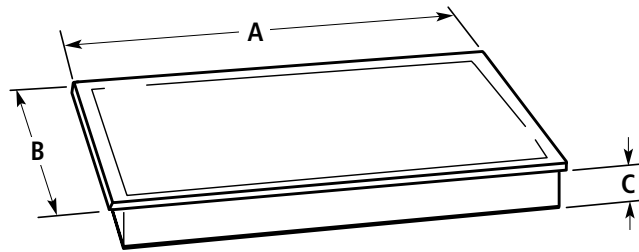

CUTOUT DIMENSIONS

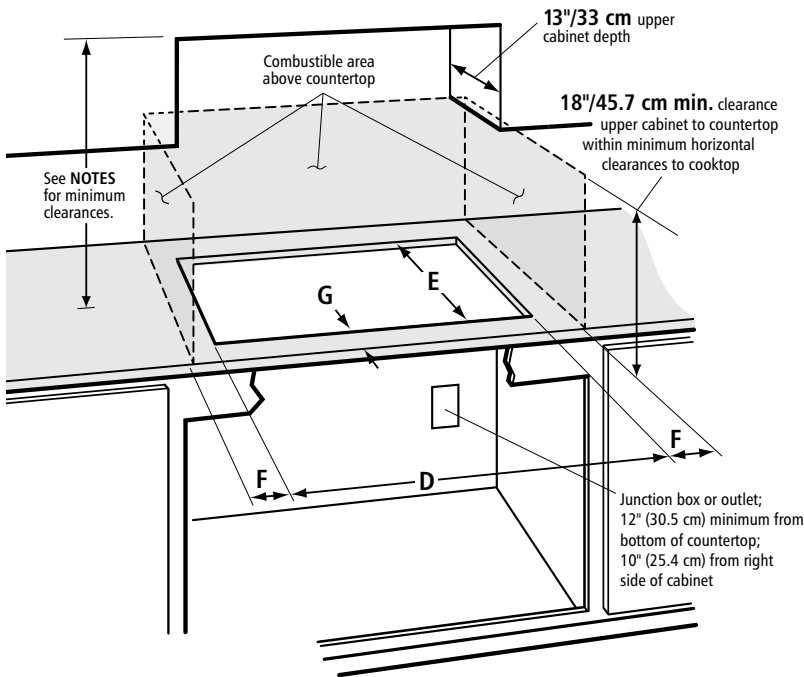

NOTES: 24" (61 cm) minimum clearance when bottom of wood or metal cabinet is covered by not less than 1/4" (0.635 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.038 cm) stainless steel, 0.024" (0.06 cm) aluminum, or 0.020" (0.05 cm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

If installing a hood or microwave hood combination above the range, follow hood or microwave hood combination installation instructions for dimensional clearances above the cooking surface.


Electric Cooktop & Retractable Downdraft System Combination

DIMENSIONS – shown in inches/cm

	36-INCH/91.4 CM* KECC568R	30-INCH/76.2 CM* KECC508R KECC507R KECC506R
MODEL NO.		
INSTALLED WITH RETRACTABLE DOWNDRAFT SYSTEM MODEL NO.	KIRD861V	KIRD801V
CUTOUT DIMENSIONS		
Width Cooktop and Downdraft Vent System (A)	37½ / 95.2	31½ / 80
Width Cooktop (B)	36⅝ / 92.2	30⅝ / 77
Width Downdraft Vent System (C)	33½ / 85.1	27½ / 69.9
Depth Downdraft Vent System (D)	2⅞ / 5.4	2⅞ / 5.4
Depth Cooktop (E)	21⅝ / 54.1	21⅝ / 54.1
Depth Cooktop and Downdraft Vent System (F)	23¼ / 59	23¼ / 59
Depth Countertop Front Edge to Cutout (G)	2 / 5.1	2 / 5.1
Depth Countertop (H)	26⅞ / 68.3 min.	25⅞ / 65.7 min.


*Installation with retractable downdraft vent system requires countertop and base cabinet deeper than standard 25" (63.5 cm) deep countertop and 24" (61 cm) deep base cabinet.

COUNTERTOP PREPARATION



CUTOUT DIMENSIONS

IMPORTANT: Countertops with a bullnosed front edge are not recommended for these installations.

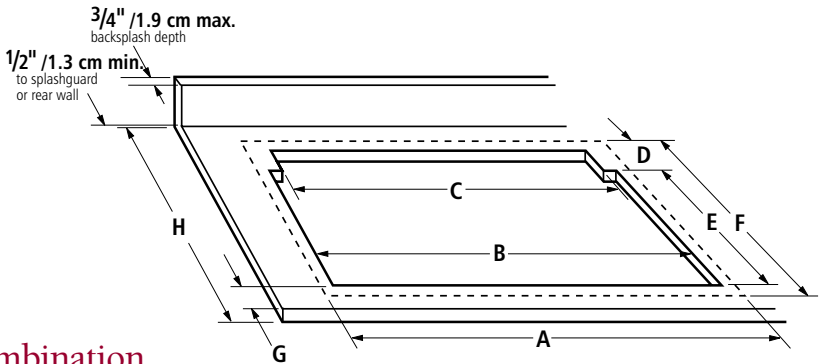

Electric Cooktop & Built-In Oven Combination

APPROVED MODEL NUMBER COMBINATIONS


ELECTRIC COOKTOPS

KECC568R, KECC508R, KECC507R, KECC506R

BUILT-IN OVENS

KEBU107S, KEBS107S, KEBK101S, KEBS177S, KEBK171S, KEBC147V

CUTOUT DIMENSIONS

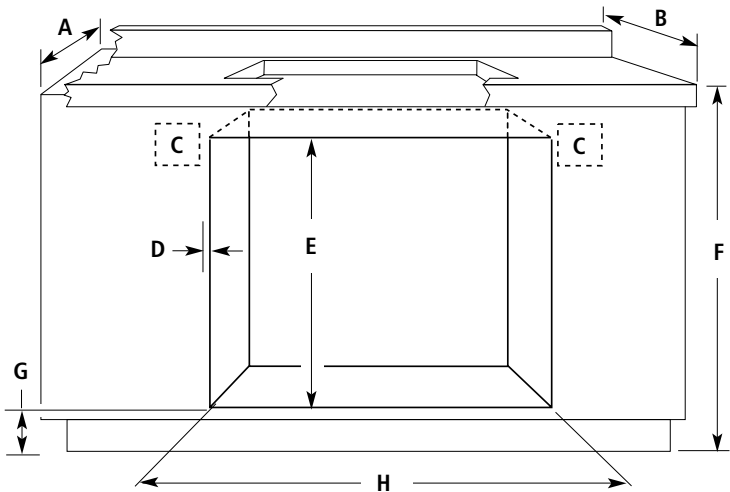

- A. 24" (61 cm) cabinet depth
- B. 25" (63.5 cm) countertop depth
- C. Recommended oven and cooktop junction box locations
- D. Allow ⅝" (1.6 cm) for oven to overlap on each side
- E. 27¾" (70.5 cm) minimum cutout height
- F. 36" (91.4 cm) from cabinet base to countertop
- G. 4⅞" (11.7 cm) from floor
- H. See chart below

DIMENSIONS – shown in inches/cm

OVEN SIZE	36"/91.4	30"/76.2	27"/68.6	24"/61
Oven Cutout Dimension	34½ / 87.6	28½ / 72.4	25½ / 64.8	22½ / 57.2

Built-In Microwave Ovens


DIMENSIONS – shown in inches/cm

MODEL NO.	30-INCH/76.2 CM KBHS109S	27-INCH/68.6 CM KBHS179S
PRODUCT DIMENSIONS		
Overall Width (A)*	29 ³ / ₄ / 75.6	26 ³ / ₄ / 67.9
Recessed Width (B)	28 ⁵ / ₁₆ / 71.9	25 ⁵ / ₁₆ / 64.3
Overall Height (C)	20 ⁵ / ₁₆ / 51.6	20 ⁵ / ₁₆ / 51.6
Recessed Height (D)	18 ³ / ₄ / 47.6	18 ³ / ₄ / 47.6
Overall Depth (E)**	26 ¹ / ₈ / 66.4	26 ¹ / ₈ / 66.4
Recessed Depth (F)	23 / 58.4	23 / 58.4
CUTOUT DIMENSIONS		
Width (G)	28 ¹ / ₂ / 72.4	25 ¹ / ₂ / 64.8
Height (H)	19 ⁷ / ₁₆ / 49.4	19 ⁷ / ₁₆ / 49.4
Depth (I)	23 ¹ / ₄ / 59	23 ¹ / ₄ / 59

*Measurements include front facing of microwave oven and door handle.


**With flush receptacle or with non-flush receptacle located in far corner of cutout.

PRODUCT DIMENSIONS

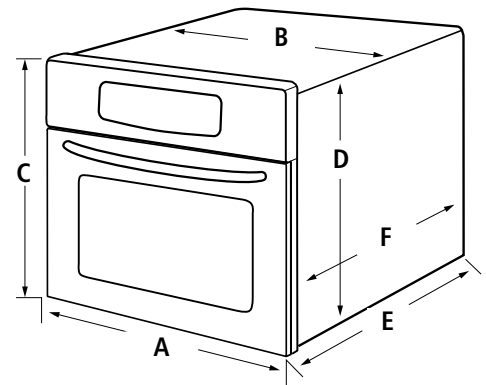


CUTOUT DIMENSIONS

KBHS109S, KBHS179S

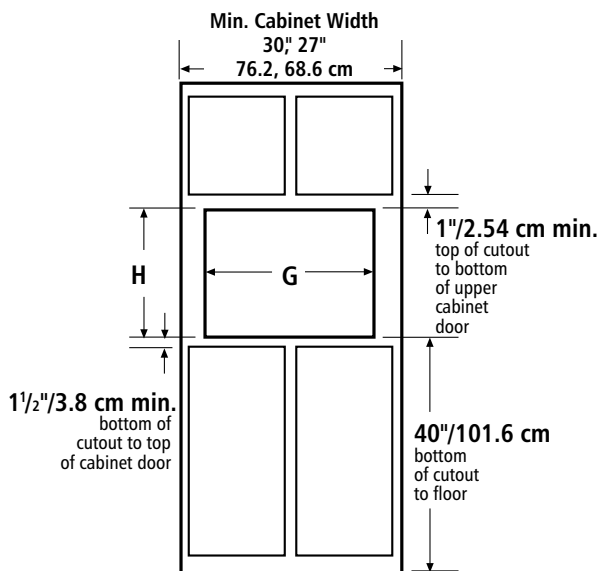


Cabinet Side View




CUTOUT DIMENSIONS – shown in inches/cm

KBMS1454S

	30"/76.2 CM INSTALLATION	27"/68.6 CM INSTALLATION
Width (G)	28 ³ / ₄ (± 3/ ₁₆) / 73 (± .48)	25 ³ / ₄ (± 3/ ₁₆) / 65.4 (± .48)

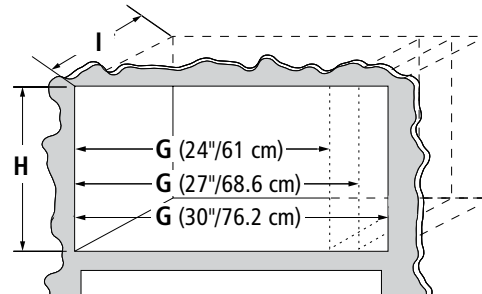

Cutout Top View

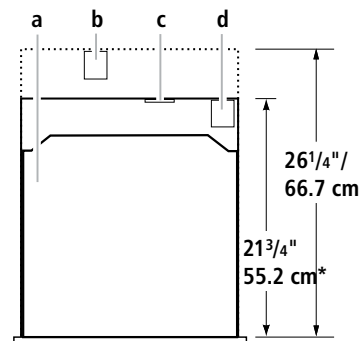

*NOTE: Product depth including handle is 21¹/₄" (54 cm).

a. Microwave oven

b. Non-flush receptacle

c. Flush receptacle


d. Non-flush receptacle located in far corner

Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

Microwave Hood Combination Ovens


PRODUCT DIMENSIONS

YKHMS2050S – 30-Inch/76.2 cm

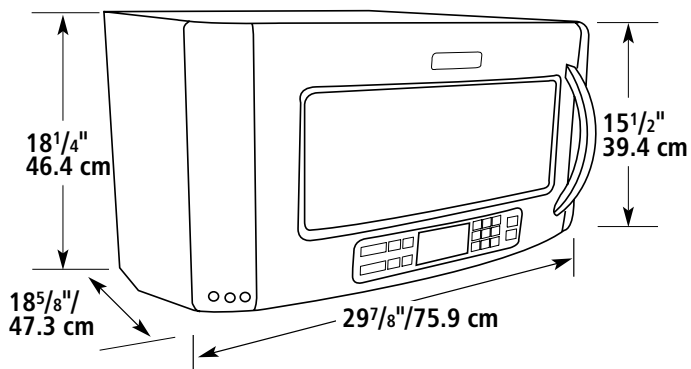


PRODUCT DIMENSIONS

YKHMS2040W – 30-Inch/76.2 cm

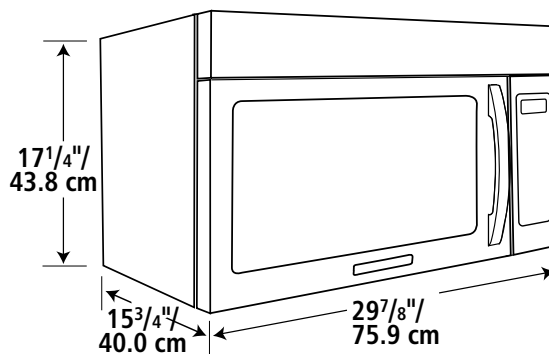


CUTOUT DIMENSIONS

YKHMS2050S – 30-Inch/76.2 cm

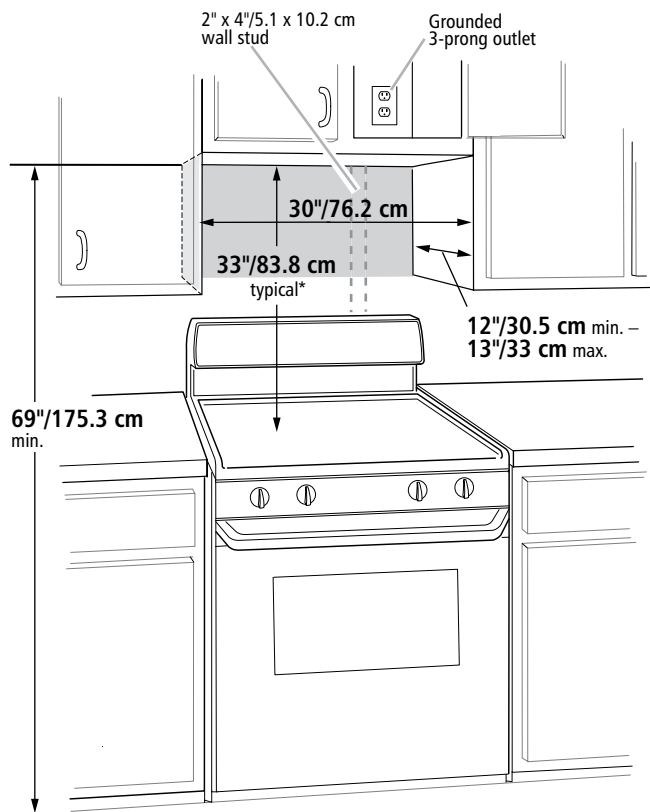

CUTOUT DIMENSIONS

YKHMS2040W – 30-Inch/76.2 cm

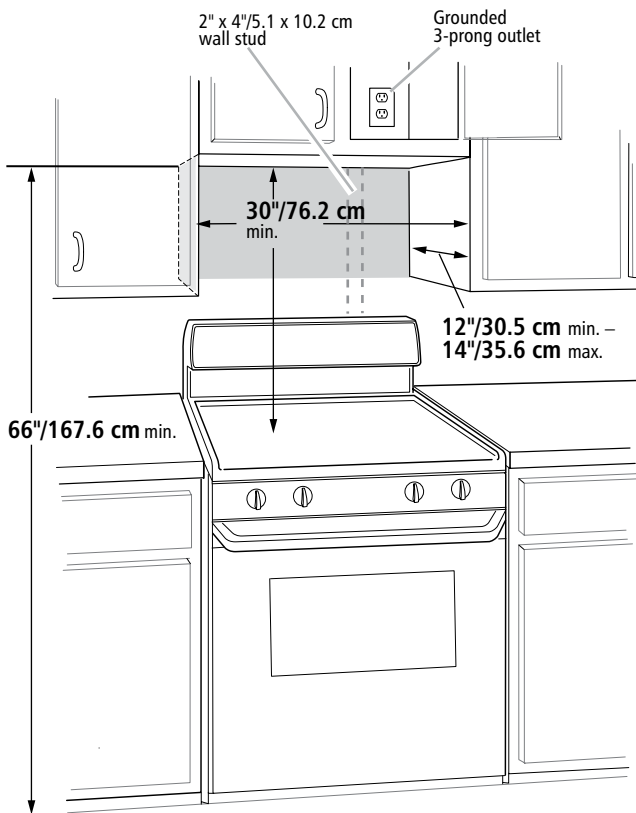


*33" (83.8 cm) is typical for 69" (175.3 cm) installation height. Exact dimension may vary depending on type of range/cooktop below.

Countertop Microwave Ovens

DIMENSIONS – shown in inches/cm

MODEL NO.	YKCMS1555S
PRODUCT DIMENSIONS	
Width (A)	21 ⁷ / ₈ / 55.2
Height (B)	12 ¹ / ₂ / 31.7
Depth (C)	17 ¹ / ₈ / 43.5

PRODUCT DIMENSIONS

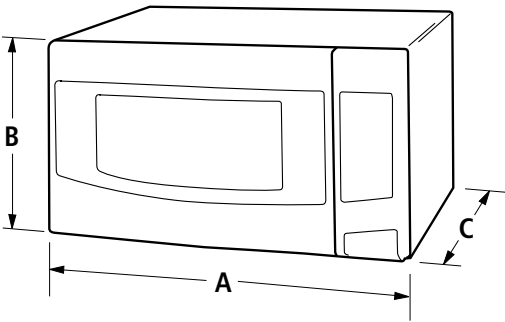


Slow Cook Warming Drawers


DIMENSIONS – shown in inches/cm

MODEL NO.	30-INCH/76.2 CM KEWS105S	27-INCH/68.6 CM KEWS175S
PRODUCT DIMENSIONS		
Overall Width (A)	29 ³ / ₄ / 75.6	26 ³ / ₄ / 67.9
Recessed Width (B)	28 ¹ / ₄ / 71.8	25 ¹ / ₄ / 64.1
Recessed Height (C)	9 / 22.9	9 / 22.9
CUTOUT DIMENSIONS		
Width (D)	28 ¹ / ₂ / 72.4	25 ¹ / ₂ / 64.8
Height (E)	9 ¹ / ₈ / 23.2	9 ¹ / ₈ / 23.2
Recessed Depth (F)	22 ³ / ₄ / 57.8	22 ³ / ₄ / 57.8

PRODUCT DIMENSIONS

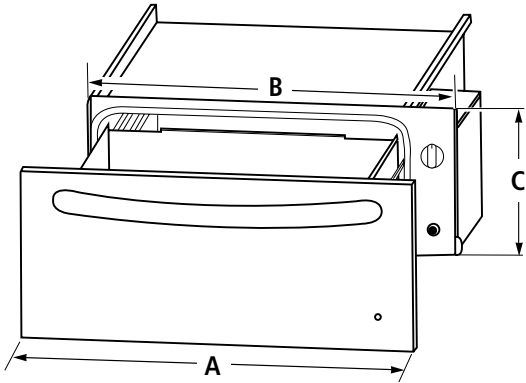


CUTOUT DIMENSIONS

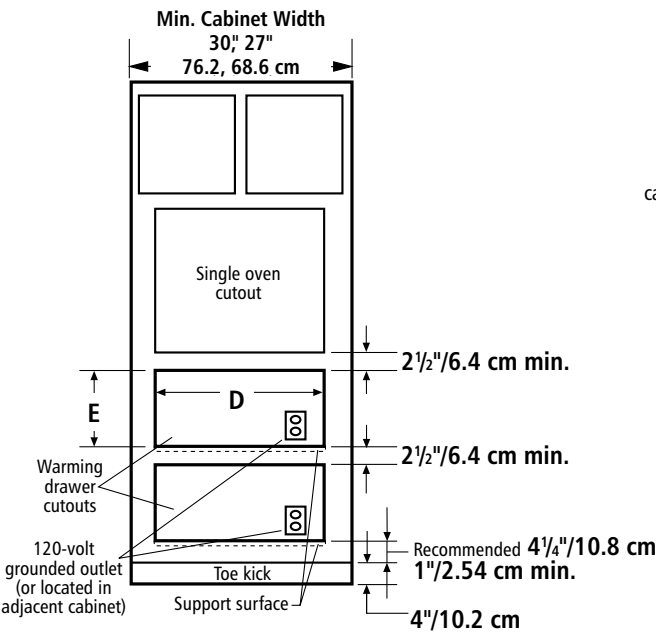

Two warming drawers under a single oven are shown.

Cabinet Side View

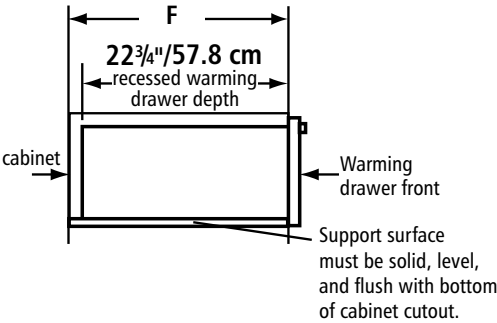


Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

Wall-Mount Canopy Hoods

PRODUCT DIMENSIONS


KXW2336Y, KXW2330Y

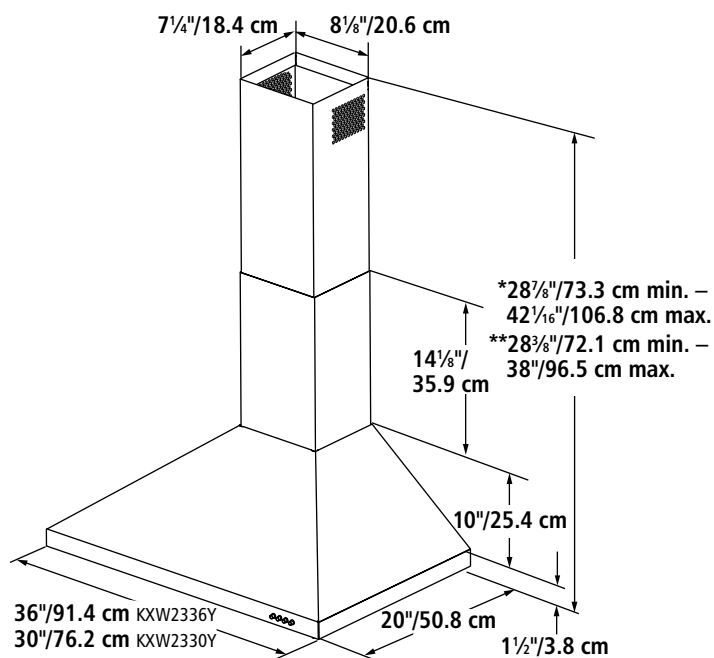

*For non-vented (recirculating) installation

**For vented installation

CUTOUT DIMENSIONS

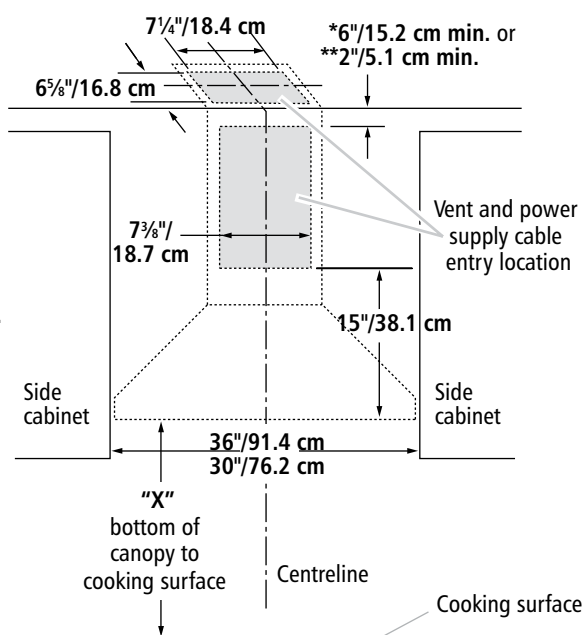

*For non-vented (recirculating) installation

**For vented installation

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 27" (68.6 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)

For vented installation, the chimney can be adjusted for ceilings between 7' 4 $\frac{3}{8}$ " and 9' 2" (224.5 cm and 279.4 cm).


For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 7' 4 $\frac{3}{8}$ " and 9' 6" (225.7 cm and 289.6 cm).

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "X" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10337357) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.

Wall-Mount Canopy Hoods (continued)

PRODUCT DIMENSIONS


KXW2536Y, KXW2530Y

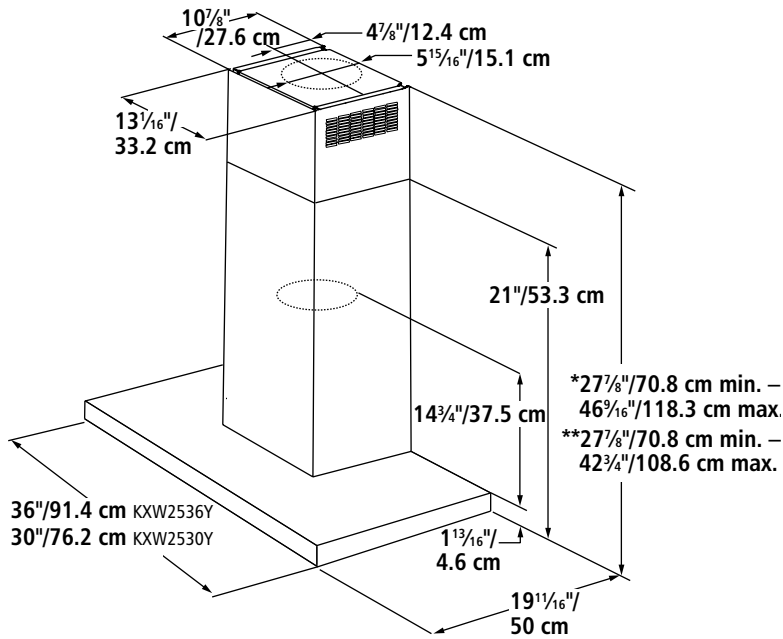

*For non-vented (recirculating) installation

**For vented installation

CUTOUT DIMENSIONS

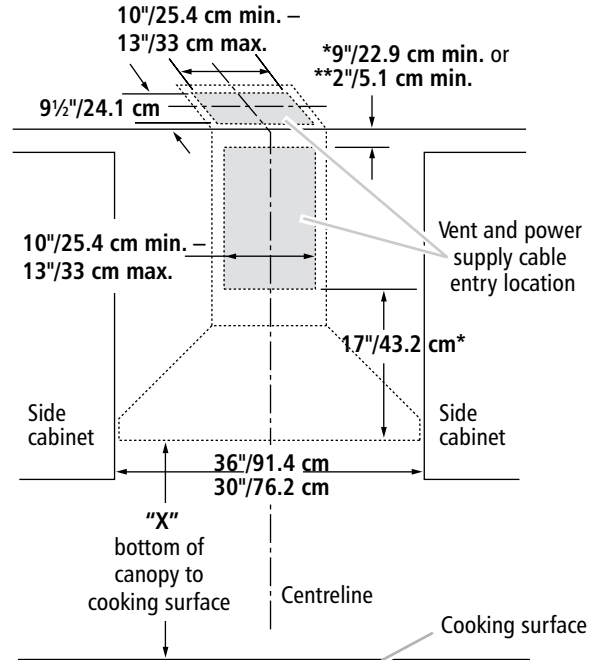

*For non-vented (recirculating) installation

**For vented installation

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 27" (68.6 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)

For vented installation, the chimney can be adjusted for ceilings between 7' 11" and 9' 0" (241.3 cm and 274.3 cm).



For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 7' 11" and 9' 6" (241.3 cm and 289.6 cm).

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "X" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10294735) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.

Wall-Mount Canopy Hoods (continued)

PRODUCT DIMENSIONS


KXW8748Y, KXW8736Y, KXW8730Y

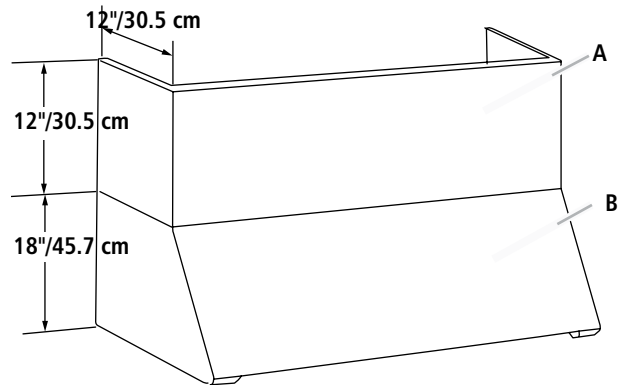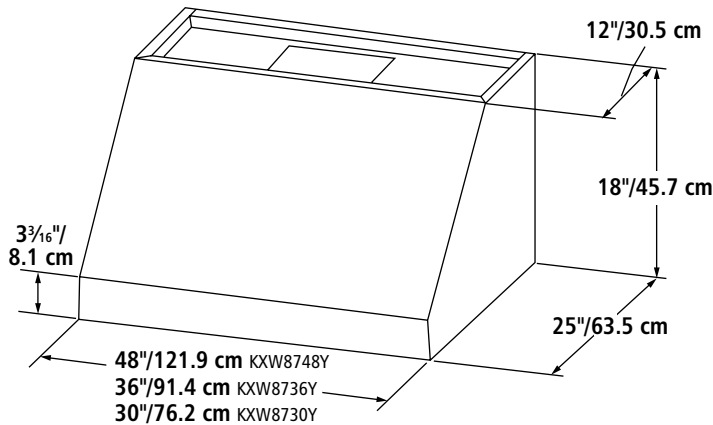

- A. Optional full-width duct cover
- B. Vent hood

CUTOUT DIMENSIONS

48", 36", or 30" (121.9, 91.4, or 76.2 cm) cabinet opening width (if installed between cabinets)

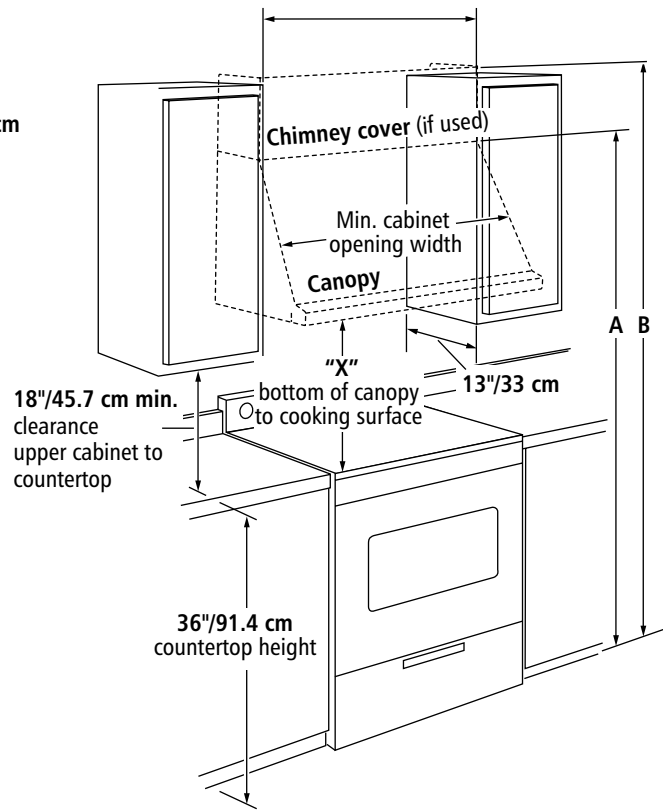

A. For installation with canopy only:

- 78" (198.1 cm) minimum above electric cooking surface
- 84" (213.4 cm) minimum above gas cooking surface

B. For installation with optional chimney cover:


- 90" (228.6 cm) minimum above electric cooking surface
- 96" (243.8 cm) minimum above gas cooking surface

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 30" (76.2 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)

Wall-Mount Canopy Hoods (continued)


PRODUCT DIMENSIONS

KXW9748Y, KXW9736Y

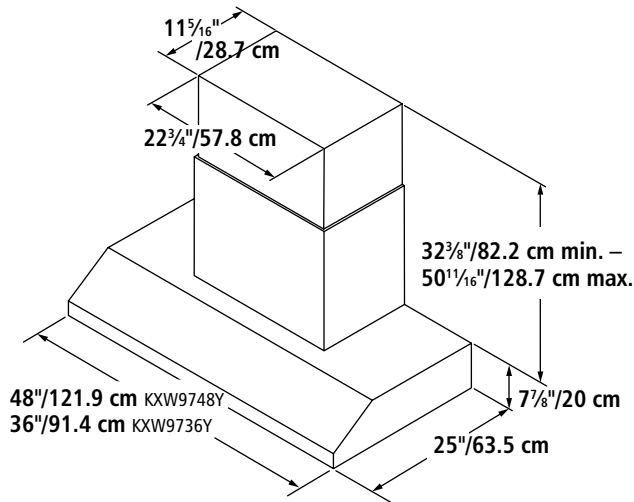

CUTOUT DIMENSIONS

$48"$ / 121.9 cm or $36"$ / 91.4 cm cabinet opening width (if installed between cabinets)

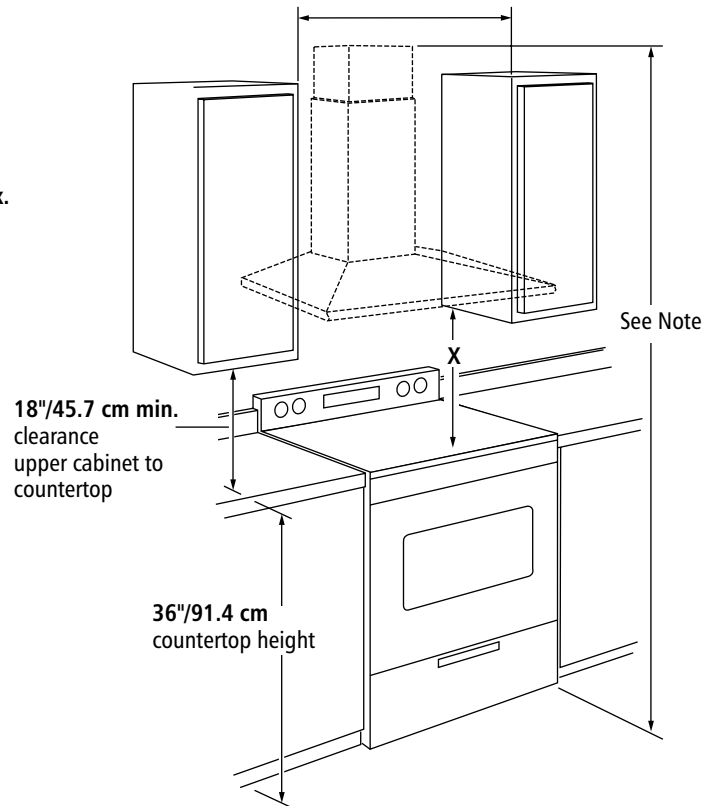

IMPORTANT: Minimum distance "X": $24"$ (61 cm) from electric cooking surface
Minimum distance "X": $27"$ (68.6 cm) from gas cooking surface
Suggested maximum distance "X": $36"$ (91.4 cm)


For vented installation, the chimney can be adjusted for ceilings between $8' 2\frac{3}{8}"$ and $8' 10\frac{3}{16}"$ (250 cm and 271.6 cm) for gas and between $7' 8\frac{3}{8}"$ and $8' 4\frac{3}{8}"$ (234.6 cm and 254.4 cm) for electric.

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "X" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10352733) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.


Slide-Out Ventilation

PRODUCT DIMENSIONS

KXU2836Y, KXU2830Y

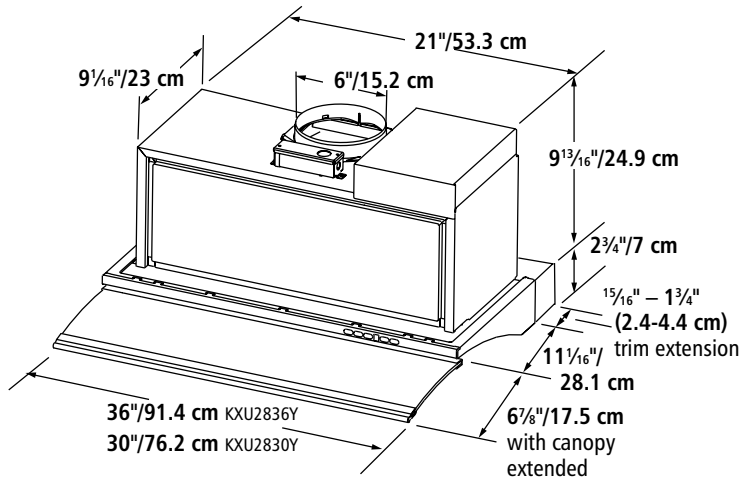


CUTOUT DIMENSIONS

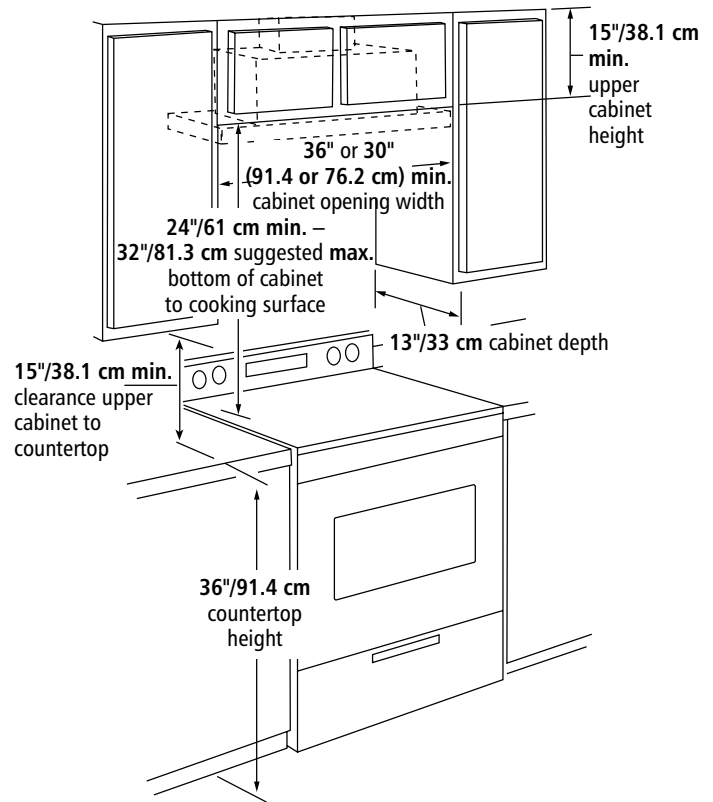


Under-the-Cabinet Hoods

PRODUCT DIMENSIONS

KXU8036Y, KXU8030Y

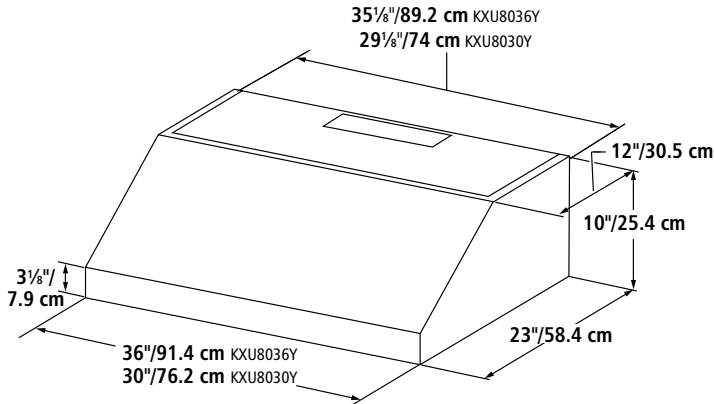

CUTOUT DIMENSIONS

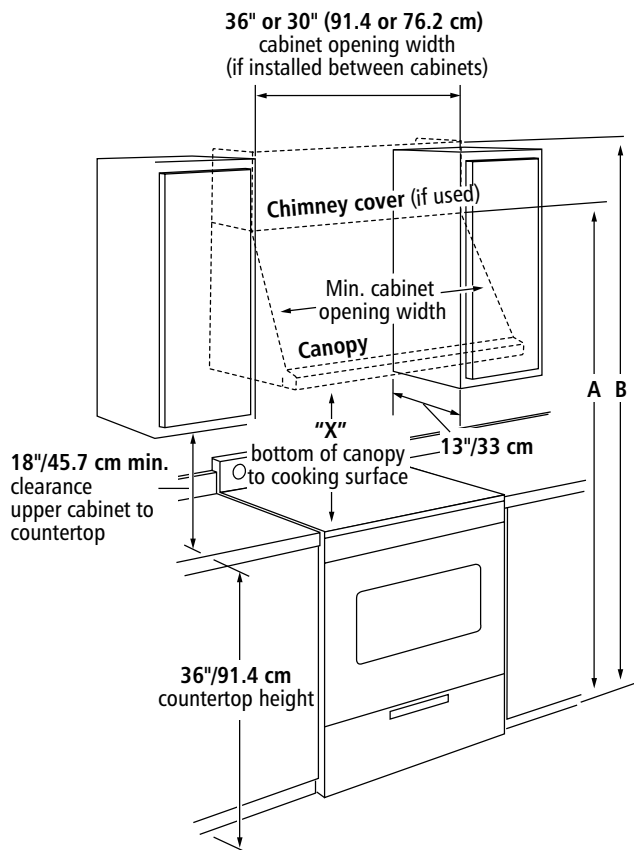

A. For installation with canopy only:

70" (177.8 cm) minimum above electric cooking surface

76" (193 cm) minimum above gas cooking surface

B. For installation with optional chimney cover:


82" (208.3 cm) minimum above electric cooking surface

88" (223.5 cm) minimum above gas cooking surface


IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 30" (76.2 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)

PRODUCT DIMENSIONS

KXU4236Y, KXU4230Y

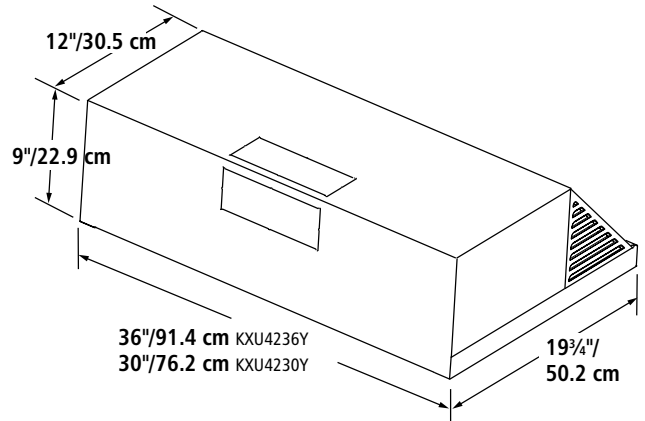

CUTOUT DIMENSIONS

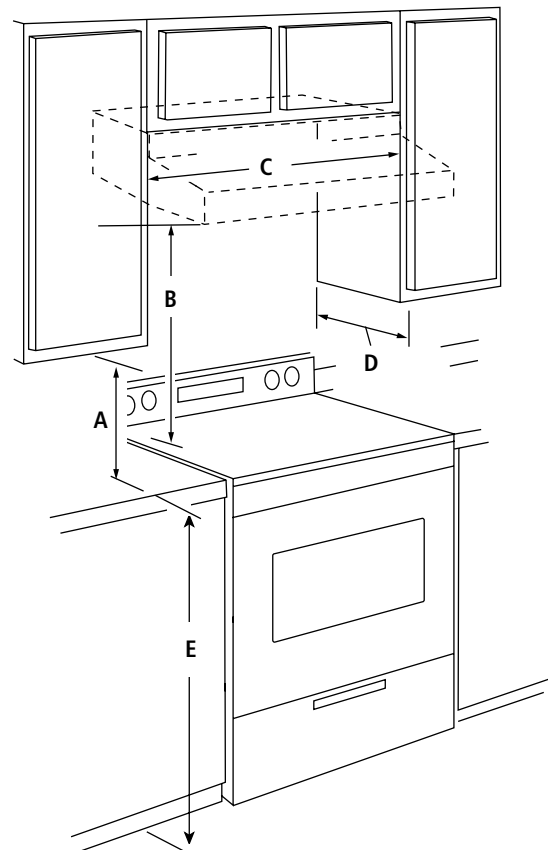

A. 18" (45.7 cm) min. clearance – upper cabinet to countertop

B. 24" (61 cm) min. from electric cooking surface, 27" (68.6 cm) min. from gas cooking surface, 36" (91.4 cm) suggested maximum – bottom of hood to cooking surface

C. 36" (91.4 cm) or 30" (76.2 cm) cabinet opening width


D. 13" (33 cm) cabinet depth

E. 36" (91.4 cm) base cabinet height

Island-Mount Canopy Hoods


PRODUCT DIMENSIONS

KXI2536Y

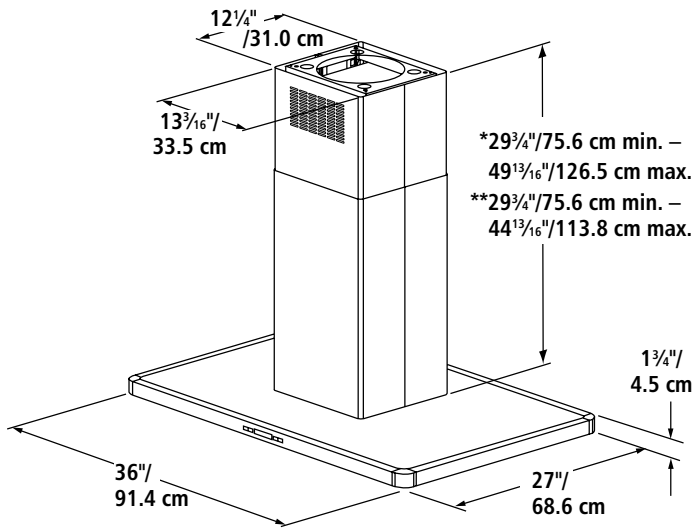

*For non-vented (recirculating) installation
 **For vented installation

CUTOUT DIMENSIONS

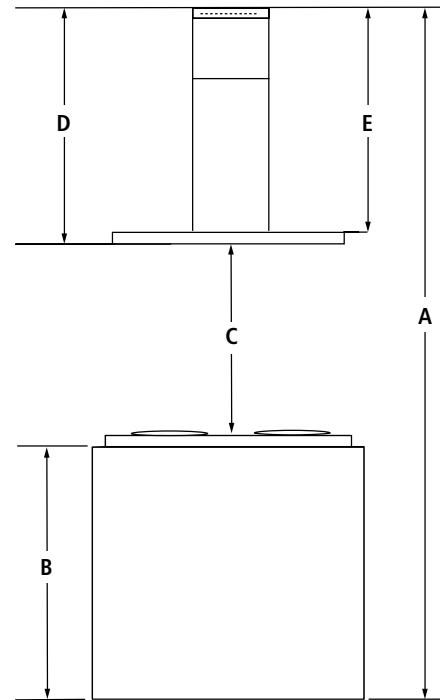

- A. Ceiling height
- B. Countertop height
- C. Hood height: 24" (61 cm) from electric cooking surface, 27" (68.6 cm) from gas cooking surface, suggested 36" (91.4 cm) maximum
- D. Hood height from ceiling to bottom of the hood: $A - B - C = D$
- E. $D - 2\frac{3}{8}"$ (6 cm) chimney assembly height

IMPORTANT: Minimum distance "C": 24" (61 cm) from electric cooking surface
 Minimum distance "C": 27" (68.6 cm) from gas cooking surface
 Suggested maximum distance "C": 36" (91.4 cm)

For vented installation, the chimney can be adjusted for ceilings between $8' 3\frac{3}{8}"$ and $9' 6\frac{3}{4}"$ (253.7 cm and 291.5 cm).


For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between $8' 3\frac{3}{8}"$ and $9' 10\frac{1}{16}"$ (253.7 cm and 301.1 cm).

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "C" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10272078) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.

Island-Mount Canopy Hoods (continued)

PRODUCT DIMENSIONS


KXI4336Y

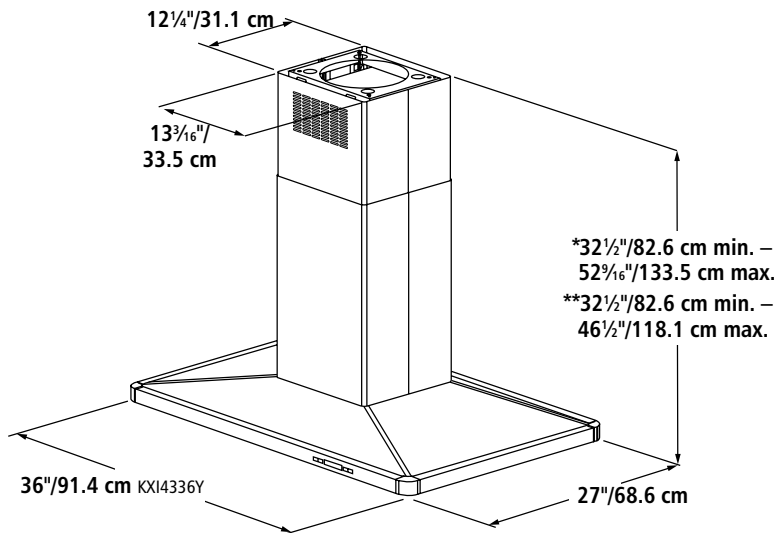

*For non-vented (recirculating) installation

**For vented installation

CUTOUT DIMENSIONS

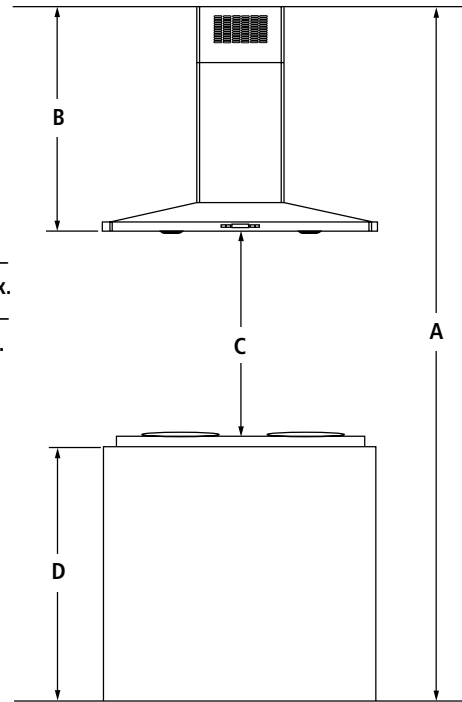

A. Ceiling height

B. Hood height from ceiling to bottom of the hood: $A - C - D = B$

C. Hood height: 24" (61 cm) from electric cooking surface, 27" (68.6 cm) from gas cooking surface, suggested 36" (91.4 cm) maximum

D. Countertop height

IMPORTANT: Minimum distance "C": 24" (61 cm) from electric cooking surface
Minimum distance "C": 27" (68.6 cm) from gas cooking surface
Suggested maximum distance "C": 36" (91.4 cm)

For vented installation, the chimney can be adjusted for ceilings between 7' 8½" and 9' 10½" (234.9 cm and 301 cm).


For non-vented (recirculating) installation, the chimney can be adjusted for ceilings between 7' 8½" and 10' 4½" (234.9 cm and 316.2 cm).

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "C" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10294735) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.


Island-Mount Canopy Hoods (continued)

PRODUCT DIMENSIONS

KXI9748Y, KXI9736Y

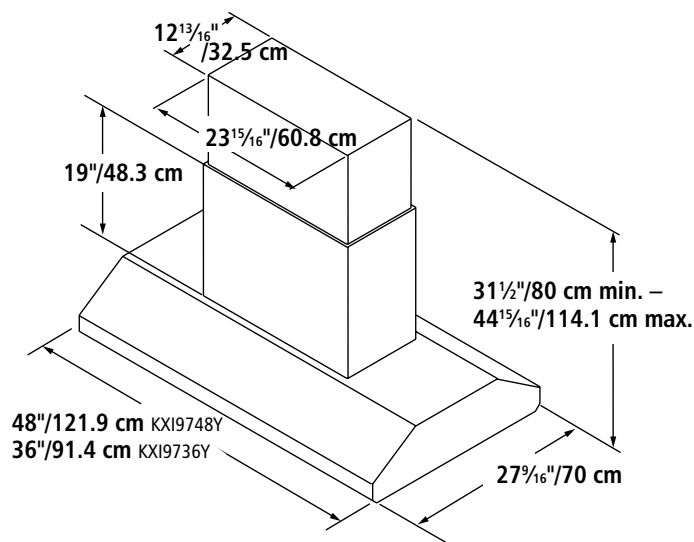

CUTOUT DIMENSIONS

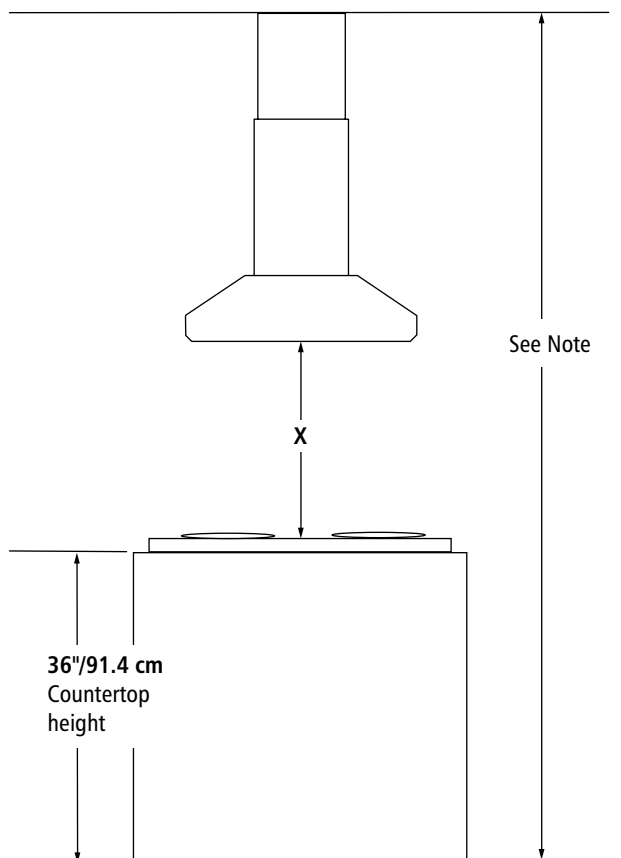

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 30" (76.2 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)


For vented installation, the chimney can be adjusted for ceilings between 7' 7 $\frac{1}{2}$ " and 9' 8 $\frac{7}{8}$ " (232.4 cm and 297 cm).

Note: The hood chimney is adjustable and designed to meet varying ceiling or soffit heights, depending on the distance "X" between the bottom of the hood and the cooking surface. For higher ceilings, a chimney extension kit (Part No. W10352732) is available from your dealer or an authorized parts distributor. The chimney extension replaces the upper chimney shipped with the hood.


Custom Hood Liners

PRODUCT DIMENSIONS

UXL6048Y, UXL6036Y

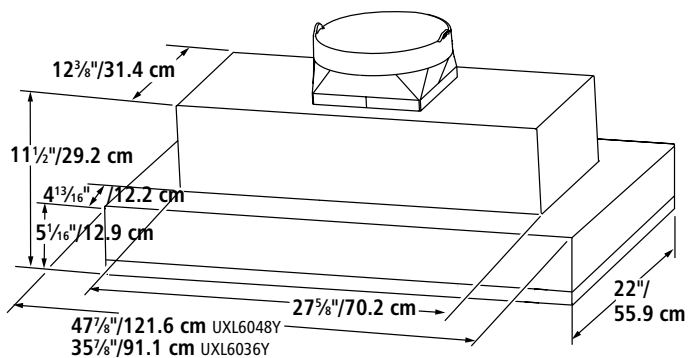

CUTOUT DIMENSIONS

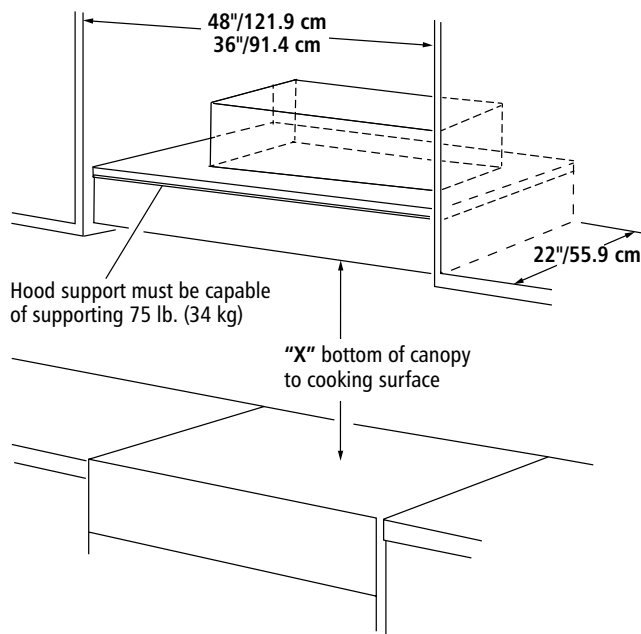

IMPORTANT: Minimum distance "X": 24" (61 cm) from electric cooking surface
Minimum distance "X": 30" (76.2 cm) from gas cooking surface
Suggested maximum distance "X": 36" (91.4 cm)


Retractable Downdraft Ventilation Systems

Fit under standard-sized cabinets

PRODUCT DIMENSIONS

With Interior-Mounted Power System


KIRD861V, KIRD801V

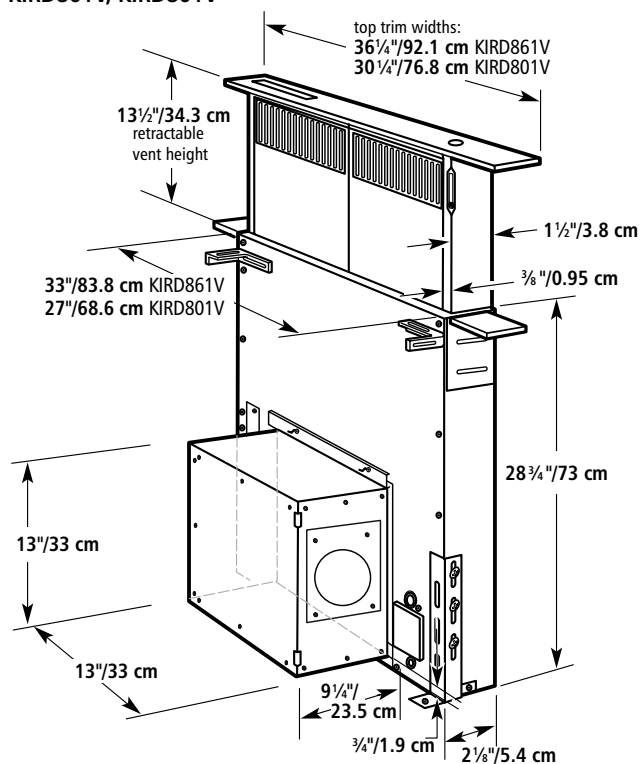

CUTOUT DIMENSIONS

CABINET OPENING

KIRD861V, KIRD801V

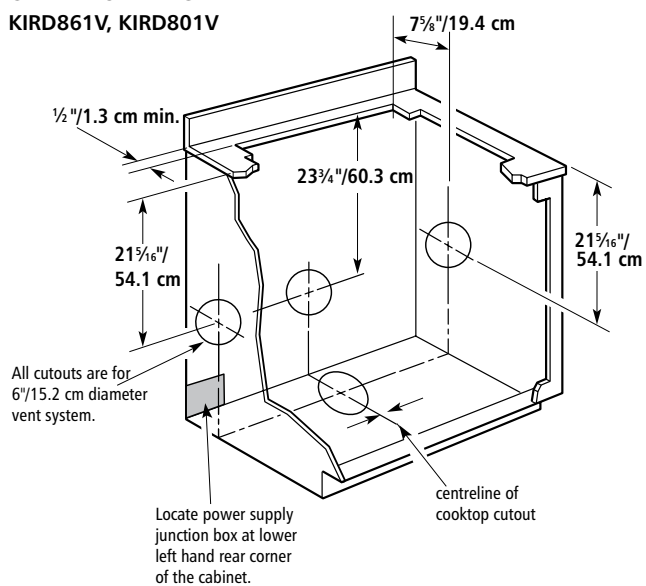


Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

Dishwashers


PRODUCT DIMENSIONS

KUDE70FX, KUDE60SX, KUDE60HX, KUDE60FX, KUDE50CX, KUDE40FXSP, KUDE40FX, KUDE20FX, KUDE20IX, KUDS30SX, KUDS30FX, KUDS30CX, KUDS30IX, KUDC10FX

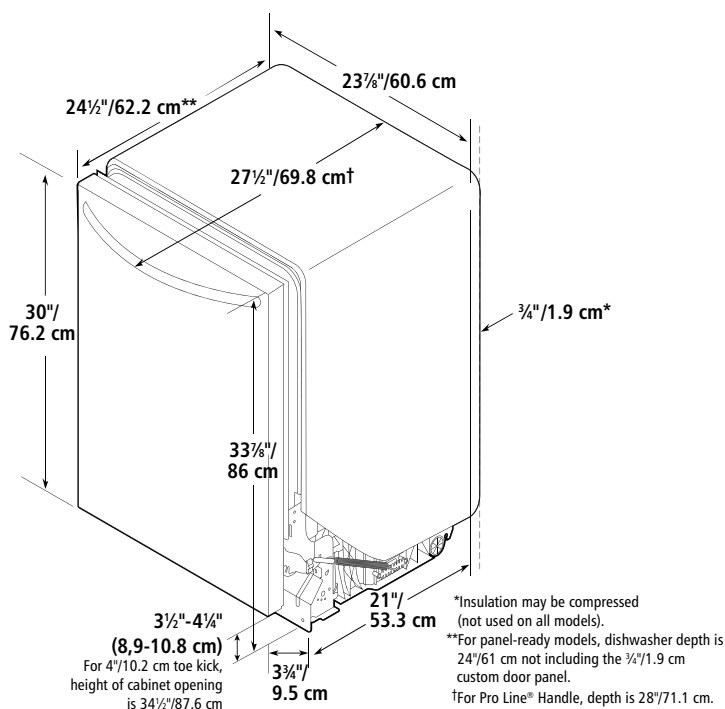


CUSTOM PANEL DIMENSIONS

KUDE70FX, KUDE60FX, KUDE40FX



*This dimension is for a 4'' (10.2 cm) toe kick. If the installation needs a higher toe kick, adjust the height of the wood panel accordingly. Not recommended for toe kicks greater than 6'' (15.2 cm).

CUTOUT DIMENSIONS

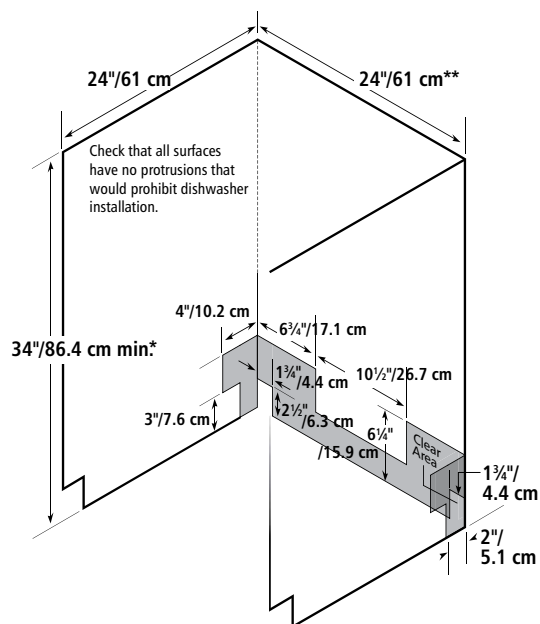


*Measured from the lowest point on the underside of countertop. May be reduced to $33\frac{5}{8}''/86\text{ cm}$ by removing wheels from dishwasher, or $33\frac{3}{4}''/85.7\text{ cm}$ by removing wheels AND perforated section in the insulation blanket.

**Minimum, measured from narrowest point of opening.


Single-Drawer Dishwasher

PRODUCT DIMENSIONS

KUDD03ST

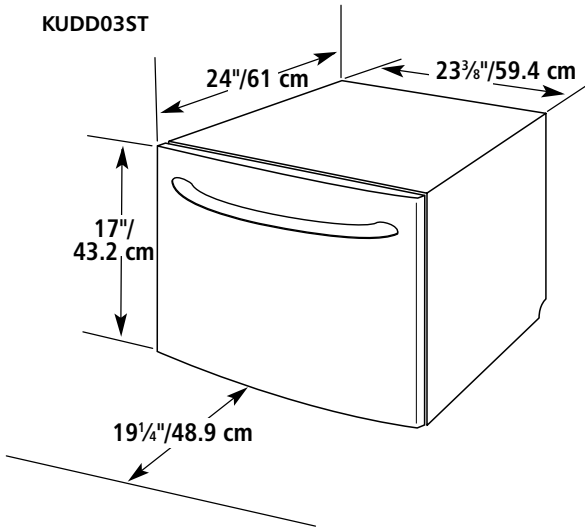


CUTOUT DIMENSIONS

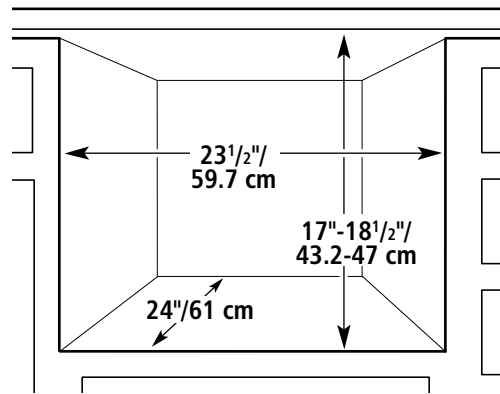


Double-Drawer Dishwasher

PRODUCT DIMENSIONS

KUDD03DT

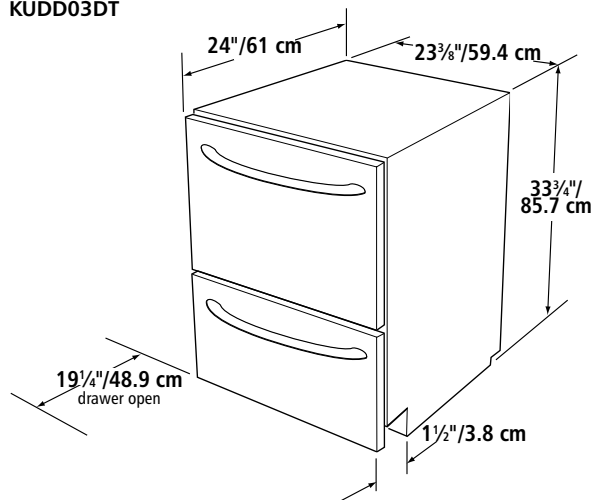


CUTOUT DIMENSIONS

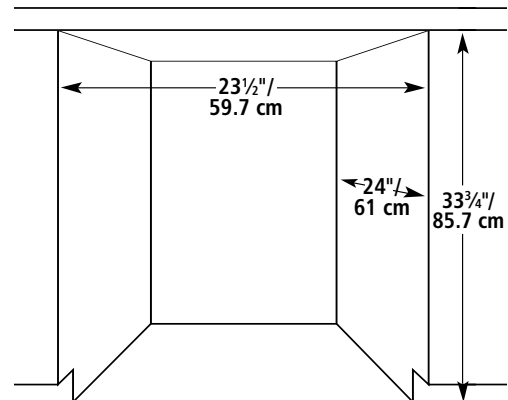

Trash Compactor


PRODUCT DIMENSIONS

KUCS03FT

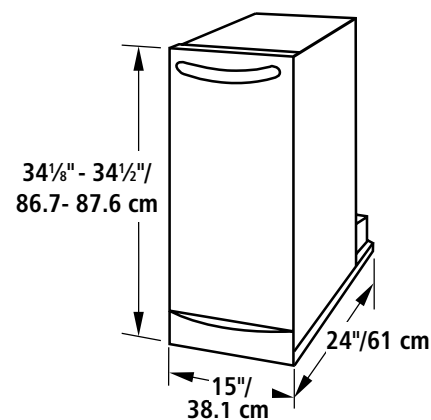

CUTOUT DIMENSIONS

KUCS03FT

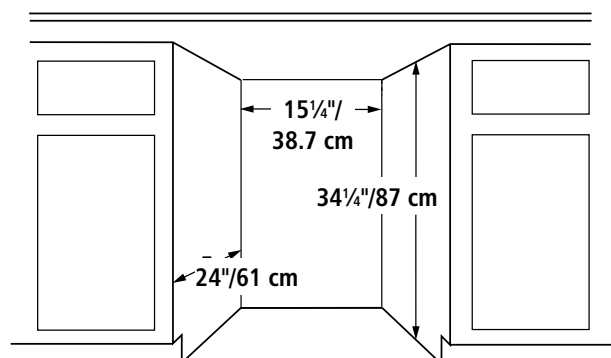

Dimensions are for planning purposes only. For additional product information, refer to the Installation Instructions and/or Use & Care Guide packed with product. Specifications subject to change without notice.

Warranty Information

For full details on any warranty, please consult the appropriate Use & Care Guide.

Refrigeration Product Limited Warranties

	1ST-2ND YEAR (parts and labour)	3RD-6TH YEAR (parts and labour)	7TH-12TH YEAR (parts only)	LIFETIME (parts only)
BUILT-IN REFRIGERATORS	Entire product	Sealed refrigeration system*	Sealed refrigeration system*	Door bins
	1ST YEAR (parts and labour)	2ND-5TH YEAR (parts and labour)	6TH-10TH YEAR (parts only)	LIFETIME (parts only)
FREESTANDING REFRIGERATORS	Entire product	Sealed refrigeration system,* refrigerator/freezer cavity liner	Sealed refrigeration system*	Slide N Lock™ Can Racks, Slide N Lock™ Door Bins
COUNTER-DEPTH REFRIGERATORS	Entire product	Sealed refrigeration system,* refrigerator/freezer cavity liner	Sealed refrigeration system*	
	1ST YEAR (parts and labour)	1ST-3RD YEAR (parts and labour)	2ND-5TH YEAR (parts and labour)	
UNDERCOUNTER REFRIGERATORS, WINE CELLARS, BEVERAGE CENTRES	Entire product		Sealed refrigeration system,* refrigerator/freezer cavity liner	
50-LB. AUTOMATIC ICE MAKERS		Entire product	Sealed refrigeration system*	

*Sealed refrigeration system includes compressor, evaporator, condenser, dryer/strainer, and connecting tubing.

Cooking Product Limited Warranties

	1ST YEAR (parts and labour)	2ND-5TH YEAR (parts only)	2ND-10TH YEAR (parts only)
BUILT-IN WALL OVENS, BUILT-IN MICROWAVE OVENS	Entire product	Electric elements, solid-state touch-control system parts	Stainless steel cavity/inner door against rust-through (on built-in microwave ovens only)
SLOW COOK WARMING DRAWERS	Entire product		
RANGETOPS, COOKTOPS	Entire product	Any cracking of the rubber seal between the ceramic glass cooktop and porcelain edge Surface unit elements Electric elements, gas burners, solid-state touch-control system parts, any cracking due to thermal shock of the ceramic-glass cooking surface	
RANGES	Entire product	Any cracking of the rubber seal between the ceramic glass cooktop and porcelain edge Surface unit elements Electric elements, gas burners, solid-state touch-control system parts, any cracking due to thermal shock of the ceramic-glass cooking surface	Porcelain oven cavity/inner door against rust-through (on steam-assist dual-fuel ranges only)
MICROWAVE/HOOD COMBINATION OVENS, COUNTERTOP MICROWAVE OVENS	Entire product	Electric element, solid-state touch-control system parts	
VENTILATION SYSTEMS	Entire product		

Warranty Information (continued)

For full details on any warranty, please consult the appropriate Use & Care Guide.

Cleaning Product Limited Warranties

	1ST YEAR (parts and labour)	2ND-5TH YEAR (parts only)	LIFETIME (parts and labour)
DISHWASHERS	Entire product	Electronic controls, nylon dish racks	Stainless steel tub, inner door liner
TRASH COMPACTORS	Entire product		
	1ST-2ND YEAR (parts and labour)	3RD-5TH YEAR (parts only)	LIFETIME (parts and labour)
DRAWER DISHWASHERS	Entire product	Upper and lower nylon dish racks, nylon cup shelves, silverware baskets	
	1ST YEAR (parts and labour)	1ST-5TH YEAR (parts and labour)	1ST-7TH YEAR (parts and labour)
FOOD WASTE DISPOSERS	Entire product model KCDB250G	Entire product models KCDI075V, KCDS075T	Entire product models KCDS100T, KBDS100T

No one knows the kitchen like KitchenAid®.

